
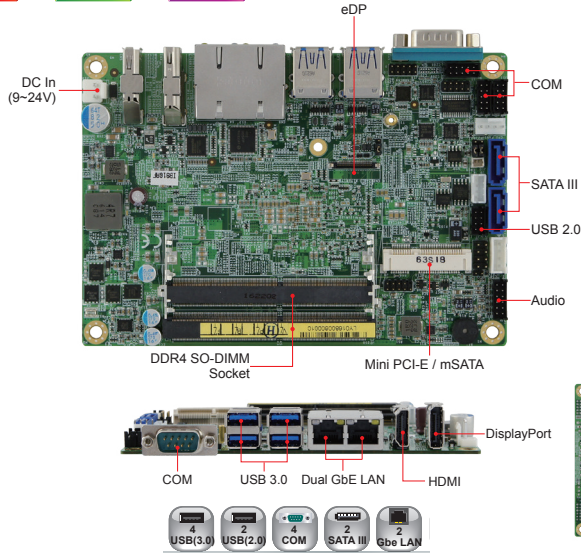

Datasheet

iBASE

IB916

The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.



IB916 with Heat spreader



IB916 with Heatsink

Features

- Onboard 7th Generation Intel® Core™ U-series processor
- 2x DDR4-2133 SO-DIMM, Max 32GB, Non-ECC
- Supports eDP, DisplayPort and HDMI 1.4
- 2x Intel® PCI-E GbE LAN
- Watchdog timer, Digital I/O, mSATA, iSMART, TPM(2.0)
- 2x USB 2.0, 4x USB 3.0, 4x COM, 2x SATA III
- 1x Mini PCI-E slot

System

CPU	BGA1356 for 7th Generation Intel® Core™ U-series i7 / i5 / i3 / Celeron® DC processors, up to 3.4GHz
System Memory	2x DDR4-2133 SO-DIMM, Max 32GB (Non-ECC)
System Chipset	Integrated in 7th Generation Intel® Core™ U-series processor
BIOS	AMI
Watchdog Timer	256 levels
SSD	1x mSATA
H/W Monitor	Yes
Expansion Slots	1x Mini PCI-E (Full-sized)

Graphics

VGA Controller	7th Generation Intel® Core™ U-series processor integrated graphics
VGA Memory	Shared memory
Display Interface	Supports eDP, DisplayPort and HDMI

LAN

Controller	IB916AF series: Intel® I219LM LAN PHY IB916F series : Intel® I219V LAN PHY Intel® I211AT PCI-E Gigabit LAN(as 2nd LAN)
Connector	2x RJ-45 on board

Multi I/O

I/O Chipset	Fintek F81846AD-I 1x RS232/422/485(jumperless selection), 3x RS232, 2x SATA III
USB	4 ports USB3.0 on board 2 ports USB2.0 on via pin header
Audio	7th Generation Intel® Core™ U-series processor built-in HD Audio controller + Realtek ALC662 codec
Others	Digital I/O, +9V~ +24V DC-in, iSMART, TPM(2.0)

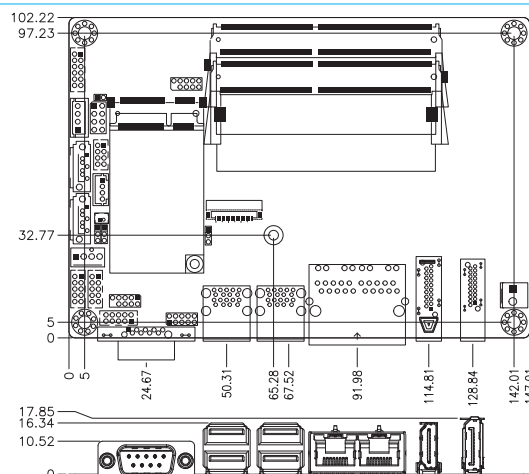
Mechanical and Environmental

Dimensions	102mm x 147mm (4" x 5.8")
Max. Power Requirement	TBD
Operating Temperature	0°C~60°C (32°F~140°F)
Storage Temperature	-20°C~80°C (-4°F~176°F)
Relative Humidity	90% (non-condensing @60°C)

Ordering Information

IB916AF-7600	3.5", Intel® Core™ i7-7600U(2.8GHz/3.9GHz), dual PCI-E GbE LAN, eDP, DP & HDMI, TPM(2.0), iSMART, mSATA, iAMT(11.6)
IB916AF-7300	3.5", Intel® Core™ i5-7300U(2.6GHz/3.5GHz), dual PCI-E GbE LAN, eDP, DP & HDMI, TPM(2.0), mSATA, iSMART
IB916F-7100	3.5", Intel® Core™ i3-7100U(2.4GHz), dual PCI-E GbE LAN, eDP, DP & HDMI, TPM(2.0), mSATA, iSMART
IB916F-3965 (MOQ)	3.5", Intel® Celeron® 3965U(2.2GHz), dual PCI-E GbE LAN, eDP, DP & HDMI, TPM(2.0), mSATA, iSMART
HSIB916-A	Heatsink for IB916/IB917
HSIB916-1	Heat spreader for IB916/IB917
IB76A	Cable Kit w/ USB, COM, Power cable, SATA+Power cable

Dimensions and Drawing



Our company network supports you worldwide with offices in Germany, Austria, Switzerland, Great Britain and the USA. For more information please contact:

Headquarters

Germany



FORTEC Elektronik AG
Lechwiesenstr. 9
86899 Landsberg am Lech

Phone: +49 8191 91172-0
E-Mail: sales@forteca.de
Internet: www.forteca.de

Fortec Group Members

Austria



FORTEC Elektronik AG
Office Vienna

Nuschinggasse 12
1230 Wien

Phone: +43 1 8673492-0
E-Mail: office@fortec.at
Internet: www.fortec.at

Germany



Distec GmbH

Augsburger Str. 2b
82110 Germering

Phone: +49 89 894363-0
E-Mail: info@distec.de
Internet: www.distec.de

Switzerland



ALTRAC AG

Bahnhofstraße 3
5436 Würenlos

Phone: +41 44 7446111
E-Mail: info@altrac.ch
Internet: www.altrac.ch

United Kingdom



Display Technology Ltd.

5 The Oaks Business Village
Revenge Road, Lordswood
Chatham, Kent, ME5 8LF

Phone: +44 1634 672755
E-Mail: info@displaytechnology.co.uk
Internet: www.displaytechnology.co.uk

USA



Apollo Display Technologies, Corp.

87 Raynor Avenue,
Unit 1 Ronkonkoma,
NY 11779

Phone: +1 631 5804360
E-Mail: info@apolloDisplays.com
Internet: www.apolloDisplays.com