

Datasheet

AUO

G215HVN01.4

UP-02-293

Product Specification

G215HVN01.4



- Preliminary Specification
- Final Specification

Module	21.5" Color TFT-LCD
Model Name	G215HVN01.4

<p>Customer</p> <hr/>	<p>Date</p> <hr/>
<p>Checked & Approved by</p> <hr/>	<hr/>
<p>Note: This Specification is subject to change without notice.</p>	

<p>Approved by</p> <hr/> <p><i>Elsie.MK.Kuo</i></p>	<p>Date</p> <hr/> <p>2023/08/01</p>
<p>Prepared by</p> <hr/>	<hr/>
<p>General Display Business Division / AUO DisplayPlus optronics corporation</p>	

Contents

1. Operating Precautions	4
2. General Description	5
2.1 Display Characteristics	5
2.2 Optical Characteristics.....	6
3. Functional Block Diagram	10
4. Absolute Maximum Ratings.....	11
4.1 TFT LCD Module	11
4.2 Backlight Unit.....	11
5. Electrical Characteristics.....	12
5.1 TFT LCD Module	12
5.2 Backlight Unit.....	15
6. Signal Characteristic.....	20
6.1 Pixel Format Image	20
6.2 Signal Description.....	21
6.3 The Input Data Format	22
6.4 Interface Timing.....	23
6.5 Power ON/OFF Sequence.....	24
7. Connector & Pin Assignment	25
7.1 TFT LCD Module: LVDS Connector	25
8. Reliability Test	26
9. Mechanical Characteristics	28
10.1 Shipping Label (on the rear side of TFT-LCD display)	30
10.2 Carton Package.....	30
10.3 Carton Label	31
11. Safety	33
11.1 Sharp Edge Requirements.....	33
11.2 Materials	33
11.3 Capacitors.....	33
11.4 National Test Lab Requirement.....	33

Product Specification

G215HVN01.4



Record of Revision

Version and Date	Page	Old description	New Description	Remark																																																																																																																																																																																														
0.1 2022/08/12	All	First Edition	All																																																																																																																																																																																															
0.2 2023/08/01	6	<p>2.2 Optical Characteristics The optical characteristics are measured under stable conditions at 25°C:-</p> <table border="1"> <thead> <tr> <th>Item</th> <th>Unit</th> <th>Conditions</th> <th>Min.</th> <th>Typ.</th> <th>Max.</th> <th>Note</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Viewing Angle</td> <td rowspan="2">[degree]</td> <td>Horizontal (Right/Left) CR = 10</td> <td>75</td> <td>89</td> <td>-</td> <td rowspan="2">1, 2¹</td> </tr> <tr> <td>Vertical (Upper/Lower) CR = 10</td> <td>75</td> <td>89</td> <td>-</td> </tr> <tr> <td rowspan="2">Contrast ratio</td> <td rowspan="2">-</td> <td>Normal Direction</td> <td>TBD</td> <td>TBD</td> <td>-</td> <td rowspan="2">3¹</td> </tr> <tr> <td>Raising Time (T_r) Falling Time (T_f) Rising + Falling</td> <td>-</td> <td>20¹ 25¹ 35¹</td> <td>-</td> </tr> <tr> <td rowspan="4">Color / Chromaticity Coordinates (CIE)</td> <td rowspan="4">-</td> <td>Red x¹</td> <td>-</td> <td>TBD</td> <td>-</td> <td rowspan="4">5¹</td> </tr> <tr> <td>Red y¹</td> <td>-</td> <td>TBD</td> <td>-</td> </tr> <tr> <td>Green x¹</td> <td>-</td> <td>TBD</td> <td>-</td> </tr> <tr> <td>Green y¹</td> <td>-</td> <td>TBD</td> <td>-</td> </tr> <tr> <td rowspan="4">Color Coordinates (CIE) White</td> <td rowspan="4">-</td> <td>White x¹</td> <td>0.283</td> <td>0.313</td> <td>0.363</td> <td rowspan="4">6¹</td> </tr> <tr> <td>White y¹</td> <td>0.279</td> <td>0.329</td> <td>0.379</td> </tr> <tr> <td>Blue x¹</td> <td>-</td> <td>TBD</td> <td>-</td> </tr> <tr> <td>Blue y¹</td> <td>-</td> <td>TBD</td> <td>-</td> </tr> <tr> <td>Central Luminance</td> <td>[cd/m²]</td> <td>-</td> <td>1200</td> <td>1500</td> <td>-</td> <td>8¹</td> </tr> <tr> <td>Luminance Uniformity</td> <td>(%)</td> <td>-</td> <td>75</td> <td>89</td> <td>-</td> <td>7¹</td> </tr> <tr> <td>Crosstalk (in 60Hz)</td> <td>(%)</td> <td>-</td> <td>-</td> <td>-</td> <td>1.5</td> <td>9¹</td> </tr> <tr> <td>Flicker</td> <td>(%)</td> <td>-</td> <td>-</td> <td>-</td> <td>20</td> <td>8¹</td> </tr> </tbody> </table>	Item	Unit	Conditions	Min.	Typ.	Max.	Note	Viewing Angle	[degree]	Horizontal (Right/Left) CR = 10	75	89	-	1, 2 ¹	Vertical (Upper/Lower) CR = 10	75	89	-	Contrast ratio	-	Normal Direction	TBD	TBD	-	3 ¹	Raising Time (T _r) Falling Time (T _f) Rising + Falling	-	20 ¹ 25 ¹ 35 ¹	-	Color / Chromaticity Coordinates (CIE)	-	Red x ¹	-	TBD	-	5 ¹	Red y ¹	-	TBD	-	Green x ¹	-	TBD	-	Green y ¹	-	TBD	-	Color Coordinates (CIE) White	-	White x ¹	0.283	0.313	0.363	6 ¹	White y ¹	0.279	0.329	0.379	Blue x ¹	-	TBD	-	Blue y ¹	-	TBD	-	Central Luminance	[cd/m ²]	-	1200	1500	-	8 ¹	Luminance Uniformity	(%)	-	75	89	-	7 ¹	Crosstalk (in 60Hz)	(%)	-	-	-	1.5	9 ¹	Flicker	(%)	-	-	-	20	8 ¹	<p>2.2 Optical Characteristics The optical characteristics are measured under stable conditions at 25°C:-</p> <table border="1"> <thead> <tr> <th>Item</th> <th>Unit</th> <th>Conditions</th> <th>Min.</th> <th>Typ.</th> <th>Max.</th> <th>Note</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Viewing Angle</td> <td rowspan="2">[degree]</td> <td>Horizontal (Right/Left) CR = 10</td> <td>75</td> <td>89</td> <td>-</td> <td rowspan="2">1, 2¹</td> </tr> <tr> <td>Vertical (Upper/Lower) CR = 10</td> <td>75</td> <td>89</td> <td>-</td> </tr> <tr> <td rowspan="2">Contrast ratio</td> <td rowspan="2">-</td> <td>Normal Direction</td> <td>3000</td> <td>5000</td> <td>-</td> <td rowspan="2">3¹</td> </tr> <tr> <td>Raising Time (T_r) Falling Time (T_f) Rising + Falling</td> <td>-</td> <td>20¹ 25¹ 35¹</td> <td>-</td> </tr> <tr> <td rowspan="4">Color / Chromaticity Coordinates (CIE)</td> <td rowspan="4">-</td> <td>Red x¹</td> <td>0.297</td> <td>0.337</td> <td>0.387</td> <td rowspan="4">5¹</td> </tr> <tr> <td>Red y¹</td> <td>0.270</td> <td>0.320</td> <td>0.370</td> </tr> <tr> <td>Green x¹</td> <td>0.269</td> <td>0.319</td> <td>0.369</td> </tr> <tr> <td>Green y¹</td> <td>0.289</td> <td>0.339</td> <td>0.389</td> </tr> <tr> <td rowspan="4">Color Coordinates (CIE) White</td> <td rowspan="4">-</td> <td>White x¹</td> <td>0.283</td> <td>0.313</td> <td>0.363</td> <td rowspan="4">6¹</td> </tr> <tr> <td>White y¹</td> <td>0.279</td> <td>0.329</td> <td>0.379</td> </tr> <tr> <td>Blue x¹</td> <td>-</td> <td>TBD</td> <td>-</td> </tr> <tr> <td>Blue y¹</td> <td>-</td> <td>TBD</td> <td>-</td> </tr> <tr> <td>Central Luminance</td> <td>[cd/m²]</td> <td>-</td> <td>1200</td> <td>1500</td> <td>-</td> <td>8¹</td> </tr> <tr> <td>Luminance Uniformity</td> <td>(%)</td> <td>-</td> <td>75</td> <td>89</td> <td>-</td> <td>7¹</td> </tr> <tr> <td>Crosstalk (in 60Hz)</td> <td>(%)</td> <td>-</td> <td>-</td> <td>-</td> <td>1.5</td> <td>9¹</td> </tr> <tr> <td>Flicker</td> <td>(%)</td> <td>-</td> <td>-</td> <td>-</td> <td>20</td> <td>8¹</td> </tr> </tbody> </table>	Item	Unit	Conditions	Min.	Typ.	Max.	Note	Viewing Angle	[degree]	Horizontal (Right/Left) CR = 10	75	89	-	1, 2 ¹	Vertical (Upper/Lower) CR = 10	75	89	-	Contrast ratio	-	Normal Direction	3000	5000	-	3 ¹	Raising Time (T _r) Falling Time (T _f) Rising + Falling	-	20 ¹ 25 ¹ 35 ¹	-	Color / Chromaticity Coordinates (CIE)	-	Red x ¹	0.297	0.337	0.387	5 ¹	Red y ¹	0.270	0.320	0.370	Green x ¹	0.269	0.319	0.369	Green y ¹	0.289	0.339	0.389	Color Coordinates (CIE) White	-	White x ¹	0.283	0.313	0.363	6 ¹	White y ¹	0.279	0.329	0.379	Blue x ¹	-	TBD	-	Blue y ¹	-	TBD	-	Central Luminance	[cd/m ²]	-	1200	1500	-	8 ¹	Luminance Uniformity	(%)	-	75	89	-	7 ¹	Crosstalk (in 60Hz)	(%)	-	-	-	1.5	9 ¹	Flicker	(%)	-	-	-	20	8 ¹	
Item	Unit	Conditions	Min.	Typ.	Max.	Note																																																																																																																																																																																												
Viewing Angle	[degree]	Horizontal (Right/Left) CR = 10	75	89	-	1, 2 ¹																																																																																																																																																																																												
		Vertical (Upper/Lower) CR = 10	75	89	-																																																																																																																																																																																													
Contrast ratio	-	Normal Direction	TBD	TBD	-	3 ¹																																																																																																																																																																																												
		Raising Time (T _r) Falling Time (T _f) Rising + Falling	-	20 ¹ 25 ¹ 35 ¹	-																																																																																																																																																																																													
Color / Chromaticity Coordinates (CIE)	-	Red x ¹	-	TBD	-	5 ¹																																																																																																																																																																																												
		Red y ¹	-	TBD	-																																																																																																																																																																																													
		Green x ¹	-	TBD	-																																																																																																																																																																																													
		Green y ¹	-	TBD	-																																																																																																																																																																																													
Color Coordinates (CIE) White	-	White x ¹	0.283	0.313	0.363	6 ¹																																																																																																																																																																																												
		White y ¹	0.279	0.329	0.379																																																																																																																																																																																													
		Blue x ¹	-	TBD	-																																																																																																																																																																																													
		Blue y ¹	-	TBD	-																																																																																																																																																																																													
Central Luminance	[cd/m ²]	-	1200	1500	-	8 ¹																																																																																																																																																																																												
Luminance Uniformity	(%)	-	75	89	-	7 ¹																																																																																																																																																																																												
Crosstalk (in 60Hz)	(%)	-	-	-	1.5	9 ¹																																																																																																																																																																																												
Flicker	(%)	-	-	-	20	8 ¹																																																																																																																																																																																												
Item	Unit	Conditions	Min.	Typ.	Max.	Note																																																																																																																																																																																												
Viewing Angle	[degree]	Horizontal (Right/Left) CR = 10	75	89	-	1, 2 ¹																																																																																																																																																																																												
		Vertical (Upper/Lower) CR = 10	75	89	-																																																																																																																																																																																													
Contrast ratio	-	Normal Direction	3000	5000	-	3 ¹																																																																																																																																																																																												
		Raising Time (T _r) Falling Time (T _f) Rising + Falling	-	20 ¹ 25 ¹ 35 ¹	-																																																																																																																																																																																													
Color / Chromaticity Coordinates (CIE)	-	Red x ¹	0.297	0.337	0.387	5 ¹																																																																																																																																																																																												
		Red y ¹	0.270	0.320	0.370																																																																																																																																																																																													
		Green x ¹	0.269	0.319	0.369																																																																																																																																																																																													
		Green y ¹	0.289	0.339	0.389																																																																																																																																																																																													
Color Coordinates (CIE) White	-	White x ¹	0.283	0.313	0.363	6 ¹																																																																																																																																																																																												
		White y ¹	0.279	0.329	0.379																																																																																																																																																																																													
		Blue x ¹	-	TBD	-																																																																																																																																																																																													
		Blue y ¹	-	TBD	-																																																																																																																																																																																													
Central Luminance	[cd/m ²]	-	1200	1500	-	8 ¹																																																																																																																																																																																												
Luminance Uniformity	(%)	-	75	89	-	7 ¹																																																																																																																																																																																												
Crosstalk (in 60Hz)	(%)	-	-	-	1.5	9 ¹																																																																																																																																																																																												
Flicker	(%)	-	-	-	20	8 ¹																																																																																																																																																																																												
	26	<p>Items Required Condition Note</p> <p>Temperature Humidity Bias (THB)¹ Ta: 50°C, 80%RH, 300hours¹ -</p> <p>High Temperature Operation (HTO)¹ Ta: 80°C, 300hours¹ -</p> <p>Low Temperature Operation (LTO)¹ Ta: -30°C, 300hours¹ -</p> <p>High Temperature Storage (HTS)¹ Ta: 80°C, 300hours¹ -</p> <p>Low Temperature Storage (LTS)¹ Ta: -30°C, 300hours¹ -</p> <p>Vibration Test (Non-operation)¹ Acceleration: 1.5 Gms¹ Wave: Random¹ Frequency: 10 - 200 Hz¹ Duration: 30 Minutes each Axis (X, Y, Z)¹ -</p> <p>Shock Test (Non-operation)¹ Acceleration: 50 G¹ Wave: Half-sine¹ Active Time: 20 ms¹ Direction: X, Y, Z (one time for each Axis)¹ -</p> <p>Drop Test¹ Height: 61 cm, package test¹ -</p> <p>Thermal Shock Test (TST)¹ 10°C/30min, 60°C/30min, 100 cycles¹ -</p> <p>On/Off Test¹ On/10sec, Off/10sec, 30,000 cycles¹ -</p> <p>ESD (Electro Static Discharge)¹ Contact Discharge: ± 8KV, 150pF(3300) 1sec, 15 points, 25 times/point¹ Air Discharge: ± 15KV, 150pF(3300) 1sec, 15 points, 25 times/point¹ 2¹</p>	<p>Items Required Condition Note</p> <p>Temperature Humidity Bias (THB)¹ Ta: 50°C, 80%RH, 300hours¹ -</p> <p>High Temperature Operation (HTO)¹ Ta: 80°C, 300hours¹ -</p> <p>Low Temperature Operation (LTO)¹ Ta: -30°C, 300hours¹ -</p> <p>High Temperature Storage (HTS)¹ Ta: 80°C, 300hours¹ -</p> <p>Low Temperature Storage (LTS)¹ Ta: -30°C, 300hours¹ -</p> <p>Vibration Test (Non-operation)¹ Acceleration: 1.5 Gms¹ Wave: Random¹ Frequency: 10 - 200 Hz¹ Duration: 30 Minutes each Axis (X, Y, Z)¹ -</p> <p>Shock Test (Non-operation)¹ Acceleration: 50 G¹ Wave: Half-sine¹ Active Time: 20 ms¹ Direction: X, Y, Z (one time for each Axis)¹ -</p> <p>Drop Test¹ Height: 61 cm, package test¹ -</p> <p>Thermal Shock Test (TST)¹ -30°C/30min, 60°C/30min, 100 cycles¹ -</p> <p>On/Off Test¹ On/10sec, Off/10sec, 30,000 cycles¹ -</p> <p>ESD (Electro Static Discharge)¹ Contact Discharge: ± 8KV, 150pF(3300) 1sec, 15 points, 25 times/point¹ Air Discharge: ± 15KV, 150pF(3300) 1sec, 15 points, 25 times/point¹ 2¹</p>																																																																																																																																																																																															
	25	<p>7.1 TFT LCD Module: LVDS Connector</p> <table border="1"> <thead> <tr> <th>Connector Name / Designation</th> <th>Interface Connector / Interface card</th> </tr> </thead> <tbody> <tr> <td>Manufacturer</td> <td>JAE or compatible</td> </tr> <tr> <td>Type Part Number</td> <td>JAE: FI-XB30SR(LHF11) or equivalent</td> </tr> <tr> <td>Mating Housing Part Number</td> <td>FI-X30HL (JAE) or compatible</td> </tr> </tbody> </table>	Connector Name / Designation	Interface Connector / Interface card	Manufacturer	JAE or compatible	Type Part Number	JAE: FI-XB30SR(LHF11) or equivalent	Mating Housing Part Number	FI-X30HL (JAE) or compatible	<p>7.1 TFT LCD Module: LVDS Connector</p> <table border="1"> <thead> <tr> <th>Connector Name / Designation</th> <th>Interface Connector / Interface card</th> </tr> </thead> <tbody> <tr> <td>Manufacturer</td> <td>P-TWO or compatible</td> </tr> <tr> <td>Type Part Number</td> <td>P-TWO (AL230F-A0G1D-P) or equivalent</td> </tr> <tr> <td>Mating Housing Part Number</td> <td>FI-X30HL (JAE) or compatible</td> </tr> </tbody> </table>	Connector Name / Designation	Interface Connector / Interface card	Manufacturer	P-TWO or compatible	Type Part Number	P-TWO (AL230F-A0G1D-P) or equivalent	Mating Housing Part Number	FI-X30HL (JAE) or compatible																																																																																																																																																																															
Connector Name / Designation	Interface Connector / Interface card																																																																																																																																																																																																	
Manufacturer	JAE or compatible																																																																																																																																																																																																	
Type Part Number	JAE: FI-XB30SR(LHF11) or equivalent																																																																																																																																																																																																	
Mating Housing Part Number	FI-X30HL (JAE) or compatible																																																																																																																																																																																																	
Connector Name / Designation	Interface Connector / Interface card																																																																																																																																																																																																	
Manufacturer	P-TWO or compatible																																																																																																																																																																																																	
Type Part Number	P-TWO (AL230F-A0G1D-P) or equivalent																																																																																																																																																																																																	
Mating Housing Part Number	FI-X30HL (JAE) or compatible																																																																																																																																																																																																	



AUO Display+

1. Operating Precautions

- 1) Since front polarizer is easily damaged, pay attention not to scratch it.
- 2) Be sure to turn off power supply when inserting or disconnecting from input connector.
- 3) Wipe off water drop immediately. Long contact with water may cause discoloration or spots.
- 4) When the panel surface is soiled, wipe it with absorbent cotton or other soft cloth.
- 5) Since the panel is made of glass, it may break or crack if dropped or bumped on hard surface.
- 6) Since CMOS LSI is used in this module, take care of static electricity and insure human earth when handling.
- 7) Do not open or modify the Module Assembly.
- 8) In case if a Module has to be put back into the packing container slot after once it was taken out from the container, take it easily, or the TFT Module may be damaged.
- 9) At the insertion or removal of the Signal Interface Connector, be sure not to rotate nor tilt the Interface Connector of the TFT Module.
- 10) After installation of the TFT Module into an enclosure, do not twist nor bend the TFT Module even momentary. At designing the enclosure, it should be taken into consideration that no bending/twisting forces are applied to the TFT Module from outside. Otherwise the TFT Module may be damaged.
- 11) Small amount of materials having no flammability grade is used in the LCD module. The LCD module should be supplied by power complied with requirements of Limited Power Source (IEC60950 or UL1950), or be applied exemption.
- 12) Severe temperature condition may result in different luminance, response time and LED life time.
- 13) The data on this specification sheet is applicable when LCD module is placed in landscape position.
- 14) Continuous displaying fixed pattern may induce image sticking. It is recommended to use screen saver or shuffle content periodically if fixed pattern is displayed on the screen.



AUO Display+

2. General Description

This specification applies to the 21.5 inch-wide Color TFT-LCD Module G215HVN01.X. The display supports the Full HD - 1920(H) x 1080(V) screen format and 16.7M colors (RGB 8-bits data). All input signals are dual channel LVDS interface.

LED driver board is included. G215HVN01.X is designed for industrial display applications.

2.1 Display Characteristics

The following items are characteristics summary on the table under 25°C condition:

ITEMS	Unit	SPECIFICATIONS
Screen Diagonal	[inch]	21.5
Active Area	[mm]	476.64 (H) x 268.11 (V)
Pixels H x V		1920(x3) x 1080
Pixel Pitch	[um]	248.25 (per one triad) x248.25
Pixel Arrangement		R.G.B. Vertical Stripe
Display Mode		VA Mode, Normally Black
White Luminance (Center)	[cd/m ²]	1500 (Typ.)
Contrast Ratio		5000 (Typ.)
Optical Response Time	[msec]	25 ms (Typ., on/off)
Nominal Input Voltage	[Volt]	+5.0 V
Backlight Input Voltage	[Volt]	+24 V
Power Consumption	[Watt]	42
Weight	[Grams]	1,600 (± 160 g)
Physical Size	[mm]	495.6(W) x 292.2(H) x 24.05(D)
Electrical Interface		Dual channel LVDS
Support Color		16.7M colors (RGB 8 bits)
Surface Treatment		Anti-Glare, 3H
Temperature Range		
Operating	[°C]	-30 to +80
Storage (Non-Operating)	[°C]	-30 to +80
RoHS Compliance		RoHS Compliance
TCO Compliance		TCO 5.1 Compliance

Product Specification

G215HVN01.4



AUO Display+

2.2 Optical Characteristics

The optical characteristics are measured under stable conditions at 25°C:


Item	Unit	Conditions	Min.	Typ.	Max.	Note
Viewing Angle	[degree]	Horizontal (Right)	75	89	-	1, 2
		CR = 10 (Left)	75	89	-	
	[degree]	Vertical (Upper)	75	89	-	
		CR = 10 (Lower)	75	89	-	
Contrast ratio		Normal Direction	3000	5000	-	3
Response Time	[msec]	Raising Time (T _{rR})	-	20	25	4
		Falling Time (T _{rF})	-	5	10	
		Raising + Falling	-	25	35	
Color / Chromaticity Coordinates (CIE)		Red x	0.590	0.640	0.690	5
		Red y	0.287	0.337	0.387	
		Green x	0.270	0.320	0.370	
		Green y	0.565	0.615	0.665	
		Blue x	0.103	0.153	0.203	
		Blue y	0.013	0.063	0.113	
Color Coordinates (CIE) White		White x	0.263	0.313	0.363	
		White y	0.279	0.329	0.379	
Central Luminance	[cd/m ²]		1200	1500	-	6
Luminance Uniformity	[%]		75	80	-	7
Crosstalk (in 60Hz)	[%]				1.5	8
Flicker	dB				-20	9



AUO Display+


Note 1: Measurement method

Before measuring, the LCD module should be turn on 30 minutes at room temperature. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a stable, windless and dark room.

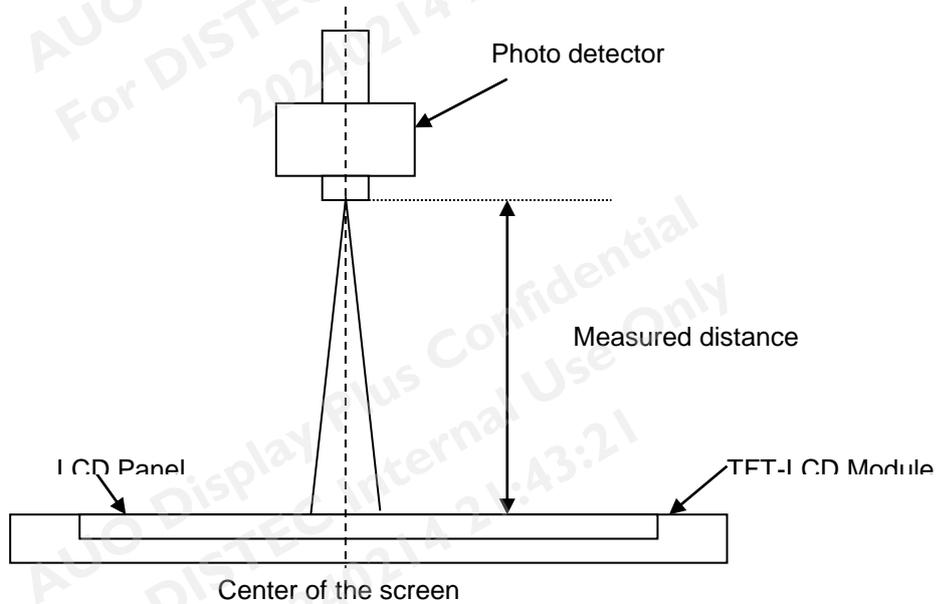

Note 2: Definition of viewing angle measured by ELDIM (EZContrast 88)

Viewing angle is the measurement of contrast ratio ≥ 10 , at the screen center, over a 180° horizontal and 180° vertical range (off-normal viewing angles). The 180° viewing angle range is broken down as follows; 90° (θ) horizontal left and right and 90° (ϕ) vertical, high (up) and low (down). The measurement direction is typically perpendicular to the display surface with the screen rotated about its center to develop the desired measurement viewing angle.

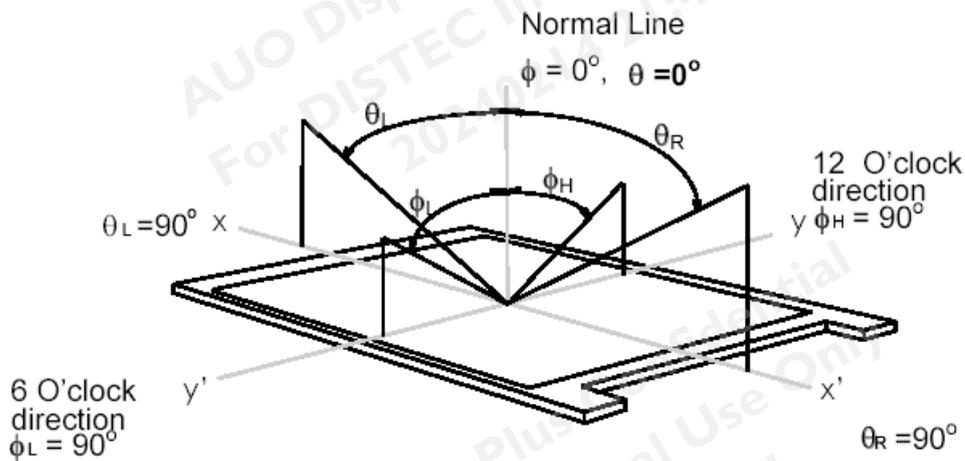

Product Specification


G215HVN01.4



Note 3: Contrast ratio is measured by TOPCON SR-3

Note 4: Definition of Response time measured by Westar TRD-100A


The output signals of photo detector are measured when the input signals are changed from “Full Black” to “Full White” (rising time, T_{rR}), and from “Full White” to “Full Black” (falling time, T_{rF}), respectively. The response time is interval between the 10% and 90% (1 frame at 60 Hz) of amplitudes.

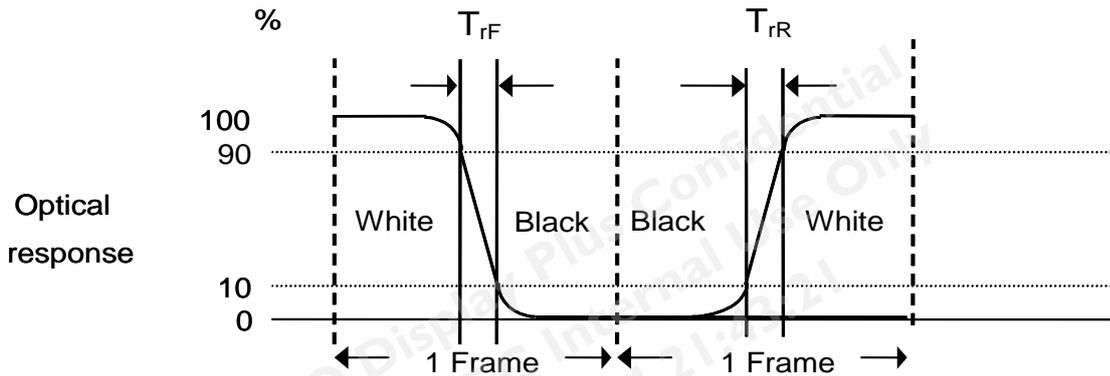

Note 5: Color chromaticity and coordinates (CIE) is measured by TOPCON SR-3

Note 6: Central luminance is measured by TOPCON SR-3

Note 7: Luminance uniformity of these 9 points is defined as below and measured by TOPCON SR-3

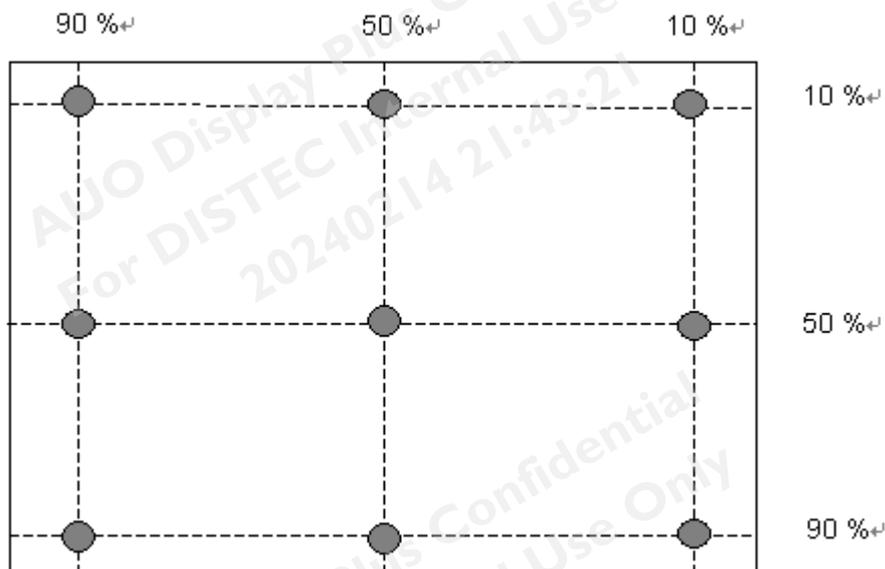

Product Specification

G215HVN01.4



$$\text{Uniformity} = \frac{\text{Minimum Luminance in 9 points (1 - 9)}}{\text{Maximum Luminance in 9 Points (1 - 9)}}$$

Note 8: Crosstalk is defined as below and measured by TOPCON SR-3

$$CT = |YB - YA| / YA \times 100 (\%)$$


Where

YA = Luminance of measured location without gray level 0 pattern (cd/m2)


YB = Luminance of measured location with gray level 0 pattern (cd/m2)



Note 9: Test Pattern: Subchecker Pattern measured by TOPCON SR-3

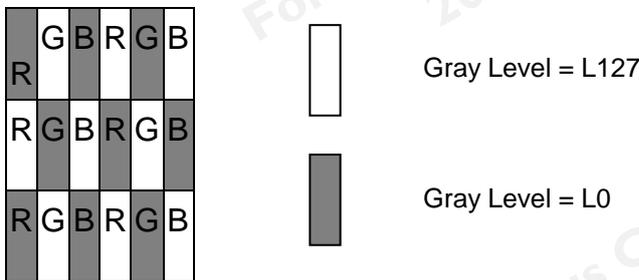

Method: Record dB value with TRD-100

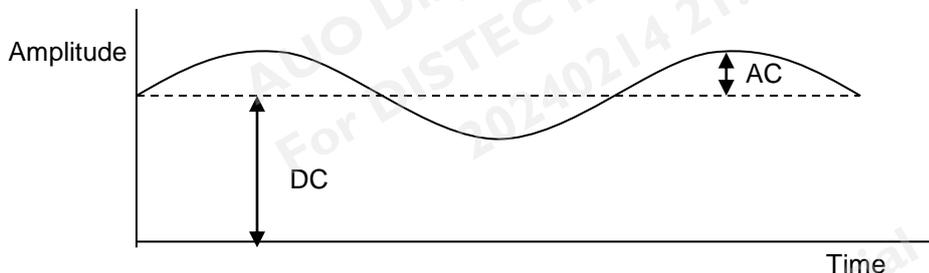


$$\text{Flicker (dB)} = 20 \log \frac{\text{AC Level (at 30 Hz)}}{\text{DC Level}}$$



3. Functional Block Diagram

The following diagram shows the functional block of this model.

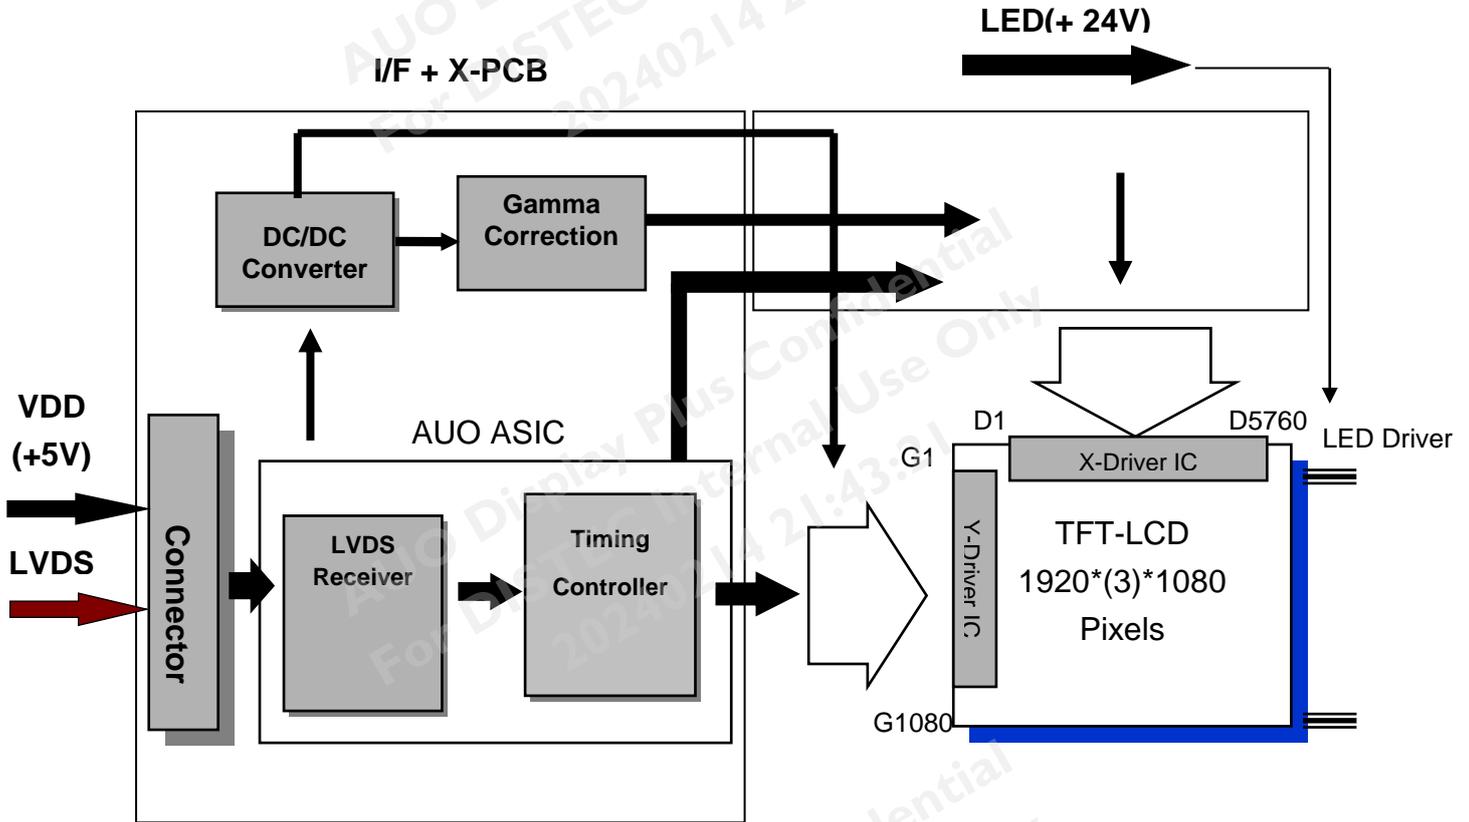

LVDS Connector: JAE (FI-XB30SRL-HF11) or equivalent.
 LED Connector: CI0114M1HRL-NH (Cvilux) or equivalent

4. Absolute Maximum Ratings

4.1 TFT LCD Module

Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive Voltage	VDD	0	5.5	[Volt]	Note 1,2

4.2 Backlight Unit

Item	Symbol	Min	Max	Unit	Conditions
LED Input Voltage	LED	21.6	26.4	[Volt]	Note 1,2

4.3 Absolute Ratings of Environment

Item	Min.	Max.	Unit	Conditions
Operating Temperature	-30	+80	[°C]	Note 3 & 4
Operation Humidity	5	90	[%RH]	
Storage Temperature	-30	+80	[°C]	
Storage Humidity	5	90	[%RH]	

Note 1: With in Ta (25°C)

Note 2: Permanent damage to the device may occur if exceeding maximum values

Note 3: For quality performance, please refer to AUO IIS (Incoming Inspection Standard).

Operating Range




Storage Range



Note 4: Operation Temperature + 60°C is defined as panel surface temperature



AUO Display+

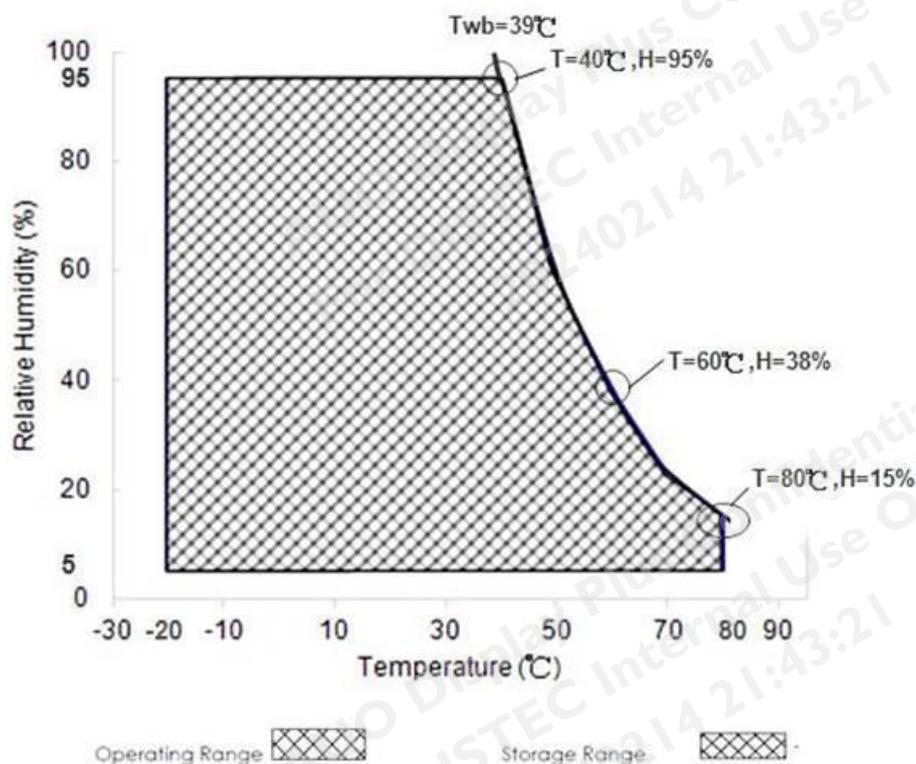

5. Electrical Characteristics

5.1 TFT LCD Module

5.1.1 Power Specification

Symbol	Parameter	Min	Typ	Max	Unit	Conditions
VDD	Logic/LCD Drive Voltage	4.5	5.0	5.5	[Volt]	+/-10%
IDD	Input Current	-	0.7	0.8	[A]	VDD= 5.0V, All white pattern, At 60Hz
		-	0.81	0.89	[A]	VDD= 5.0V, All white pattern At 75Hz,
PDD	VDD Power	-	3.5	4.4	[Watt]	VDD= 5.0V, All white pattern, At 60Hz
		-	4.05	4.9	[Watt]	VDD= 5.0V, All white pattern At 75Hz,
IRush	Inrush Current	-	-	3	[A]	Note 1
VDDrp	Allowable Logic/LCD Drive Ripple Voltage	-	-	500	[mV] p-p	VDD= 5.0V, All white Pattern At 75Hz


Product Specification

G215HVN01.4



Note 1: Measurement conditions:

The duration of rising time of power input is 470us.

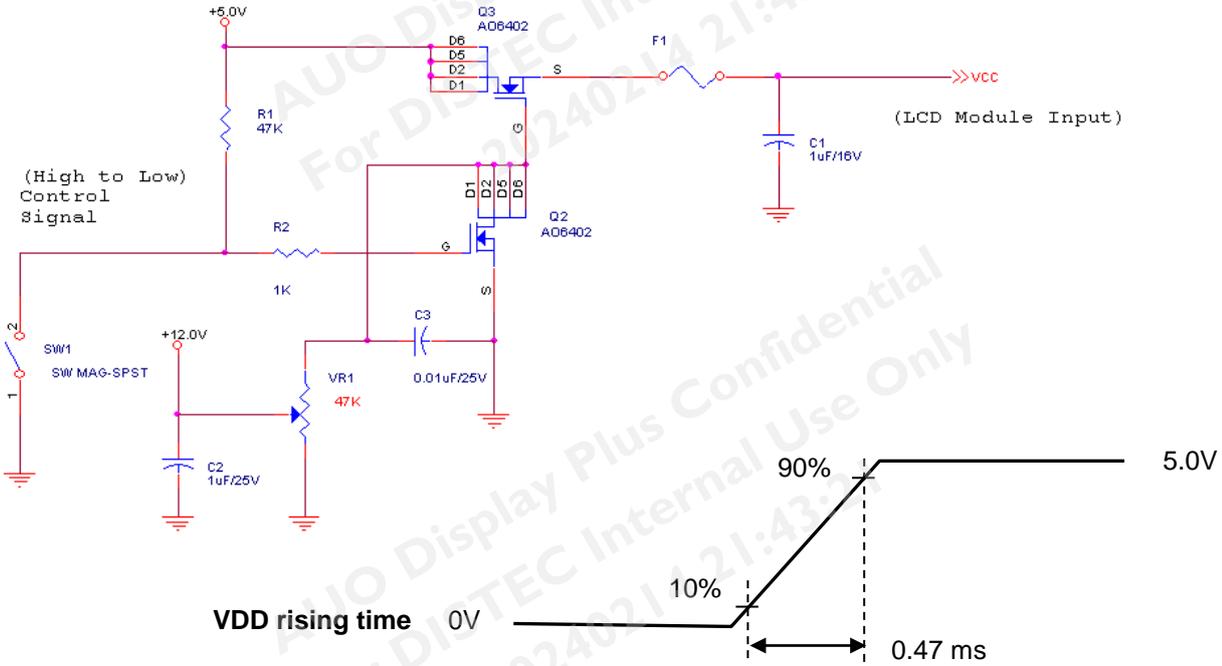




AUO Display+

5.1.2 Signal Electrical Characteristics

Input signals shall be low or Hi-Z state when VDD is off. Please refer to specifications of SN75LVDS82DGG (Texas Instruments) in detail.

Symbol	Parameter	Min	Typ	Max	Units	Condition
V_{TH}	Differential Input High Threshold	-	-	+100	[mV]	$V_{CM} = 1.2V$, Note 1
V_{TL}	Differential Input Low Threshold	-100	-	-	[mV]	$V_{CM} = 1.2V$ Note 1
$ V_{ID} $	Input Differential Voltage	100	-	600	[mV]	Note 1
V_{CM}	Differential Input Common Mode Voltage	+1.0	+1.2	+1.5	[V]	$V_{TH} - V_{TL} = 200MV$ (max) Note 1

Note 1: LVDS Signal Waveform

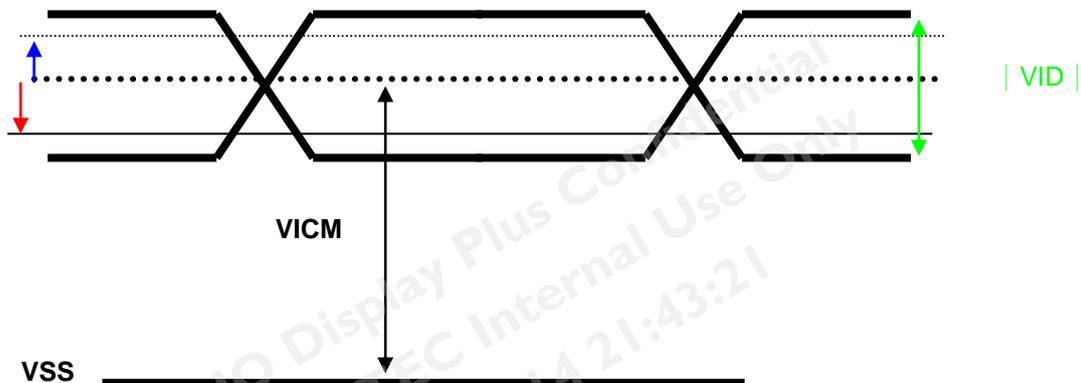

5.2 Backlight Unit

5.2.1 LED

Following characteristics are measured under stable condition at 25°C(Room Temperature).

Symbol	Parameter	Min	Typ	Max	Unit	Remark
LED	Input Voltage	-	57.8	-	Volt	
PLED	Power Consumption	-	41		Watt	
I _F	LED Forward Current	-	80	-	mA	Ta = 25°C, Note1
LTLED	LED Life Time (Brightness decay)	50,000	-	-	Hrs	Note 4

Note 1: Ta means ambient temperature.

Note 2: If module is driven by high current or at high ambient temperature & humidity condition. The operating life will be reduced.

Note 3: LED light bar structure: (2 Light bar x 4 strings x 20pcs / string =160pcs LED)

Note 4: Definition of life time: Brightness becomes to 50% of its original value. The minimum life time of LED unit is on the condition of I_F = 80 mA and 25°C (Room Temperature).

5.2.2 Input of BLU (with driver)

(Darwin P/N : 55.21G0W.DE0 DARFON Model : V351-405)

Item	Symbol	Min.	Typ.	Max.	Unit	Note
Driving Type	<input type="checkbox"/> Analog <input checked="" type="checkbox"/> PWM 180 Hz					
Input voltage	V _{in}	21.6	24	26.4	V[dc]	
Input current	I _{in}	-	1.71	-	A[dc]	24VDC Full Load
Power consumption	P _{BL}		41		Watt	
Test conditions	Environment	T=25±3°C H=65±20%				
	Method	See attachment " test detail-1 (a)"				

5.2.3 Pin assignment: Define by Light-bar Drawing:

LED light-bar Connector Manufacturer	Cvilux
--------------------------------------	--------


Product Specification

G215HVN01.4




LB-U

PIN ASSIGNMENT (CONNECTOR)	
PIN 1	-
PIN 2	-
PIN 3	+
PIN 4	+
PIN 5	-
PIN 6	-

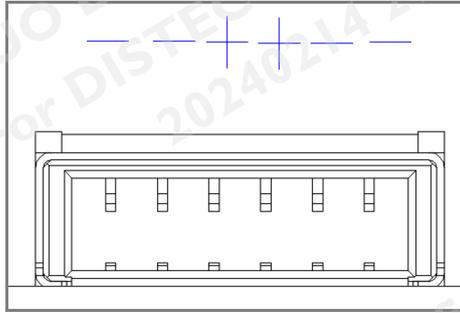


LB-D

PIN ASSIGNMENT (CONNECTOR)	
PIN 1	-
PIN 2	-
PIN 3	+
PIN 4	+
PIN 5	-
PIN 6	-

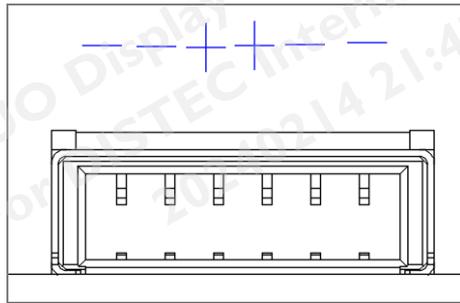

5.2.3 Pin assignment: Define by Driver Board Drawing:

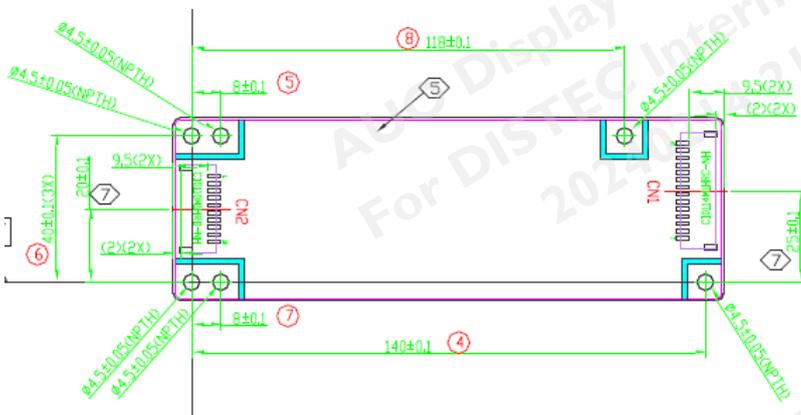

Product Specification

G215HVN01.4



AUO Display+

Input connector (CN1)

TYPE: CI0114M1HRL-NH (Cvilux) or equivalent

Pin No.	Signal Name	Feature
1	VBL	Supply Voltage 24V
2	VBL	Supply Voltage 24V
3	VBL	Supply Voltage 24V
4	VBL	Supply Voltage 24V
5	VBL	Supply Voltage 24V
6	GND	Ground
7	GND	Ground
8	GND	Ground
9	GND	Ground
10	GND	Ground
11	DET	Normal (GND) Abnormal (Open Collector)
12	BLON	BL ON/OFF
13	NC	(Note 14)
14	E_PWM	External PWM Control

Output connector (CN3)

TYPE: CI0110M1HRD-NH (Cvilux) or compatible

Pin No.	Signal Name	Feature
1	VLED1+	High Voltage
2	LB CH1-4(-)	Feedback Pin
3	LB CH1-3(-)	Feedback Pin
4	LB CH1-2(-)	Feedback Pin
5	LB CH1-1(-)	Feedback Pin
6	LB CH2-1(-)	Feedback Pin
7	LB CH2-2(-)	Feedback Pin
8	LB CH2-3(-)	Feedback Pin
9	LB CH2-4(-)	Feedback Pin
10	VLED1+	High Voltage

Product Specification

G215HVN01.4



AUO Display+

5.2.4 Interface Characteristics

No	ITEM	SYMBOL	CONDITION TEST	MIN	TYPE	MAX	UNIT	NOTE(9-12)	
1	On/Off Control Voltage	ON	—	2.0	—	5.5	V		
		OFF	—	0	—	0.8	V		
2	Error Signal	ERR	—	—	—	—	—	Normal: GND Abnormal: Open collector (Note 12)	
3	External PWM Control Voltage	H	VSEL = H	2.0	—	3.3	V	ON Duration	(Note 13)
		L	VSEL = H	0	—	0.8	V	OFF Duration	
4	Control Signal Rising Time	Tr	—	—	—	100	ms	See Fig.1	
5	Control Signal Falling Time	Tf	—	—	—	100	ms		
6	VBL Rising Time	Tr1	—	20	—	—	ms		
7	VBL Falling Time	Tf1	—	20	—	—	ms		
8	PWM Signal Rising Time	TPWMR	—	—	—	50	us		
9	PWM Signal Falling Time	TPWMF	—	—	—	50	us		
10	Input impedance	RIN	—	300	—	—	KΩ	VBLON / VEPWM	
11	BLON Delay Time	Ton	—	300	—	500	mS		
12	BLON Off Time	Toff	—	300	—	500	ms		
13	External Dimming Control Frequency	FEPWM	—	90	—	240	Hz		
14	External Dimming Control Duty	EPWM	—	10	—	100	%	Note 9	

Note 9: Dimming range between 10~20% only guarantee DB function OK, but linearity is different with 20~80%)



AUO Display+

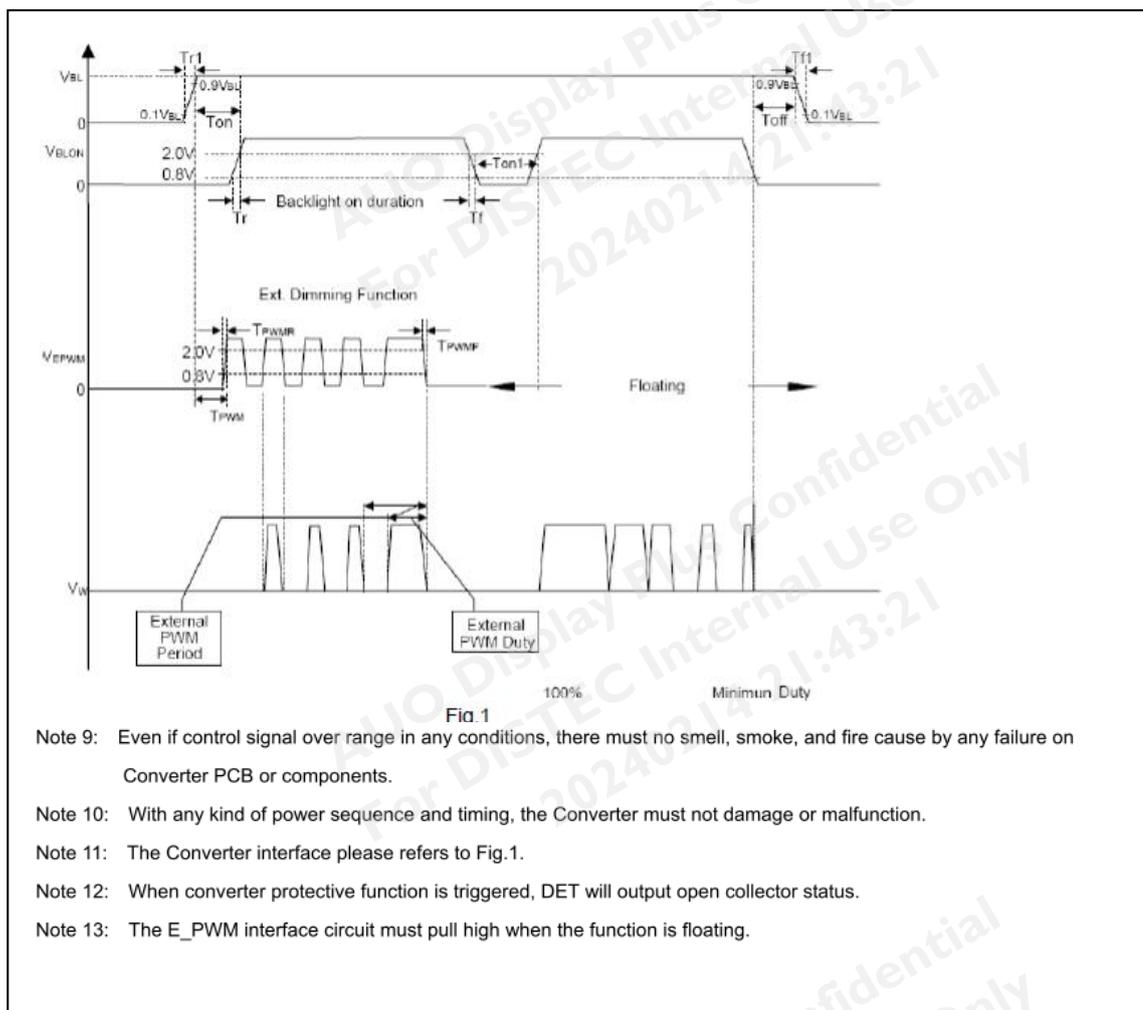


Fig.1

Note 9: Even if control signal over range in any conditions, there must no smell, smoke, and fire cause by any failure on Converter PCB or components.

Note 10: With any kind of power sequence and timing, the Converter must not damage or malfunction.

Note 11: The Converter interface please refers to Fig.1.

Note 12: When converter protective function is triggered, DET will output open collector status.

Note 13: The E_PWM interface circuit must pull high when the function is floating.

5.2.5 Protection Characteristics

NO	ITEM	TEST CONDITION	RESPONSE OF SUBJECT	NOTE
1	Output Short Circuit Protection(SCP)	Each Output	Shutdown or (fuse open)	
2	Output Over Voltage Protection(OVP)	135 Vmax	Shutdown or (Latch)	
3	Input Over Voltage Protection (IOP)	-	Shutdown or (Auto-reset)	
4	Input Under Voltage Protection (IUP)	18V	Shutdown or (Auto-reset)	
5	Output Connector Open	Each Connector	No damage or hazardous condition will occur	



AUO Display+

6.2 Signal Description


The module using a pair of LVDS receiver SN75LVDS82(Texas Instruments) or compatible. LVDS is a differential signal technology for LCD interface and high speed data transfer device. Transmitter shall be SN75LVDS83(negative edge sampling) or compatible. The first LVDS port(RxOxxx) transmits odd pixels while the second LVDS port(RxExxx) transmits even pixels.

PIN #	SIGNAL NAME	DESCRIPTION
1	RXinO0-	Negative LVDS differential data input (Odd data)
2	RXinO0+	Positive LVDS differential data input (Odd data)
3	RXinO1-	Negative LVDS differential data input (Odd data)
4	RXinO1+	Positive LVDS differential data input (Odd data)
5	RXinO2-	Negative LVDS differential data input (Odd data, H-Sync, V-Sync, DSPTMG)
6	RXinO2+	Positive LVDS differential data input (Odd data, H-Sync, V-Sync, DSPTMG)
7	GND	Power Ground
8	RxOCLKIN-	Negative LVDS differential clock input (Odd clock)
9	RxOCLKIN+	Positive LVDS differential clock input (Odd clock)
10	RXinO3-	Negative LVDS differential data input (Odd data)
11	RXinO3+	Positive LVDS differential data input (Odd data)
12	RXinE0-	Negative LVDS differential data input (Even data)
13	RXinE0+	Positive LVDS differential data input (Even data)
14	GND	Power Ground
15	RXinE1-	Negative LVDS differential data input (Even data)
16	RXinE1+	Positive LVDS differential data input (Even data)
17	GND	Power Ground
18	RXinE2-	Negative LVDS differential data input (Even data)
19	RXinE2+	Positive LVDS differential data input (Even data)
20	RxECLKIN-	Negative LVDS differential clock input (Even clock)
21	RxECLKIN+	Positive LVDS differential clock input (Even clock)
22	RXinE3-	Negative LVDS differential data input (Even data)
23	RXinE3+	Positive LVDS differential data input (Even data)
24	GND	Power Ground
25	NC	No connection (for AUO test only. Do not connect)
26	NC	No connection (for AUO test only. Do not connect)
27	NC	No connection (for AUO test only. Do not connect)
28	VDD	Power +5V
29	VDD	Power +5V
30	VDD	Power +5V



AUO Display+

6.3 The Input Data Format

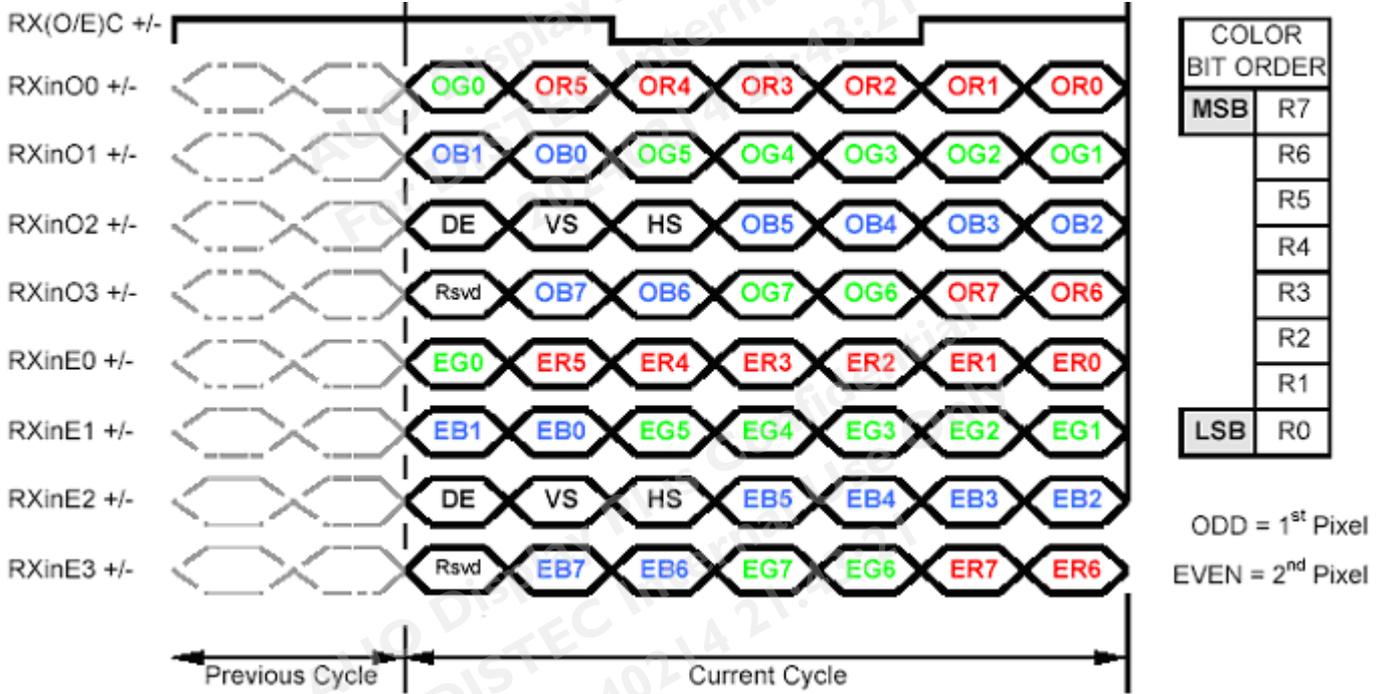

Note1: 8-bits signal input.
Note2: L:NS alike H:Thine alike



6.4 Interface Timing


6.4.1 Timing Characteristics

Signal	Item	Symbol	Min	Typ	Max	Unit
Clock	Frequency	$1/T_{\text{Clock}}$	40	72	83	MHz
Frame Rate	Frequency	F	50	60	75	Hz
Vertical Section	Period	T_V	1092	1130	1653	T_line
	Active	T_{VD}	1080	1080	1080	
	Blanking	T_{VB}	12	50	573	
Horizontal Section	Period	T_H	1004	1050	1100	T_clock
	Active	T_{HD}	960	960	960	
	Blanking	T_{HB}	44	90	140	

Note: DE mode only.

Note: Typical value refer to VESA STANDARD


6.4.2 Input Timing Diagram

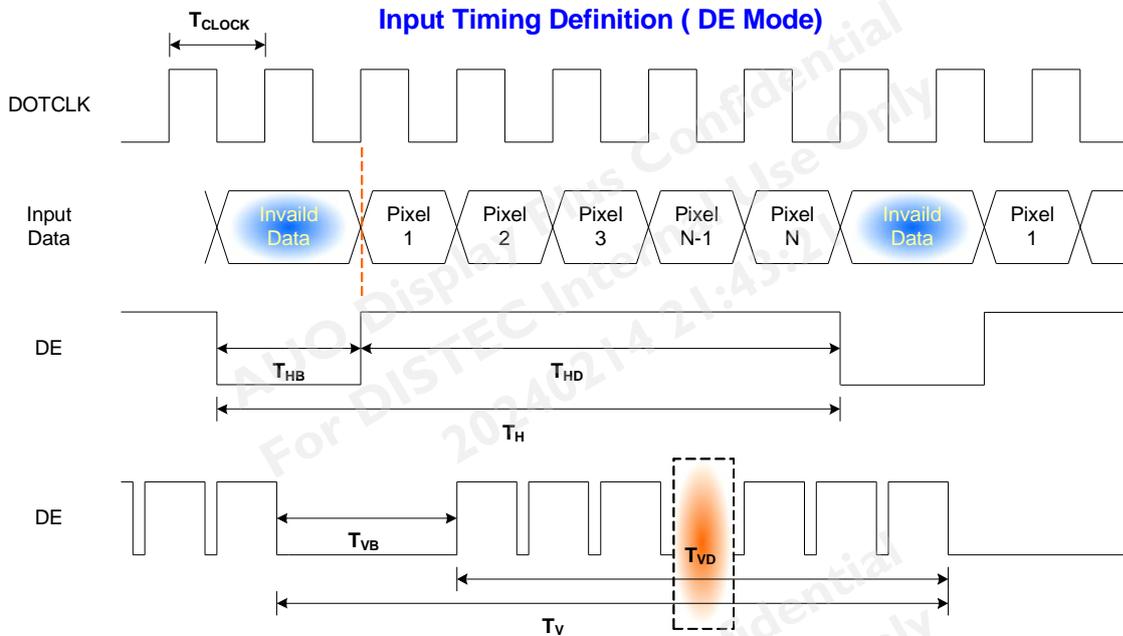



6.5 Power ON/OFF Sequence

VDD power and B/L on/off sequence is as below. Interface signals are also shown in the chart. Signals from any system shall be Hi-Z state or low level when VDD is off.

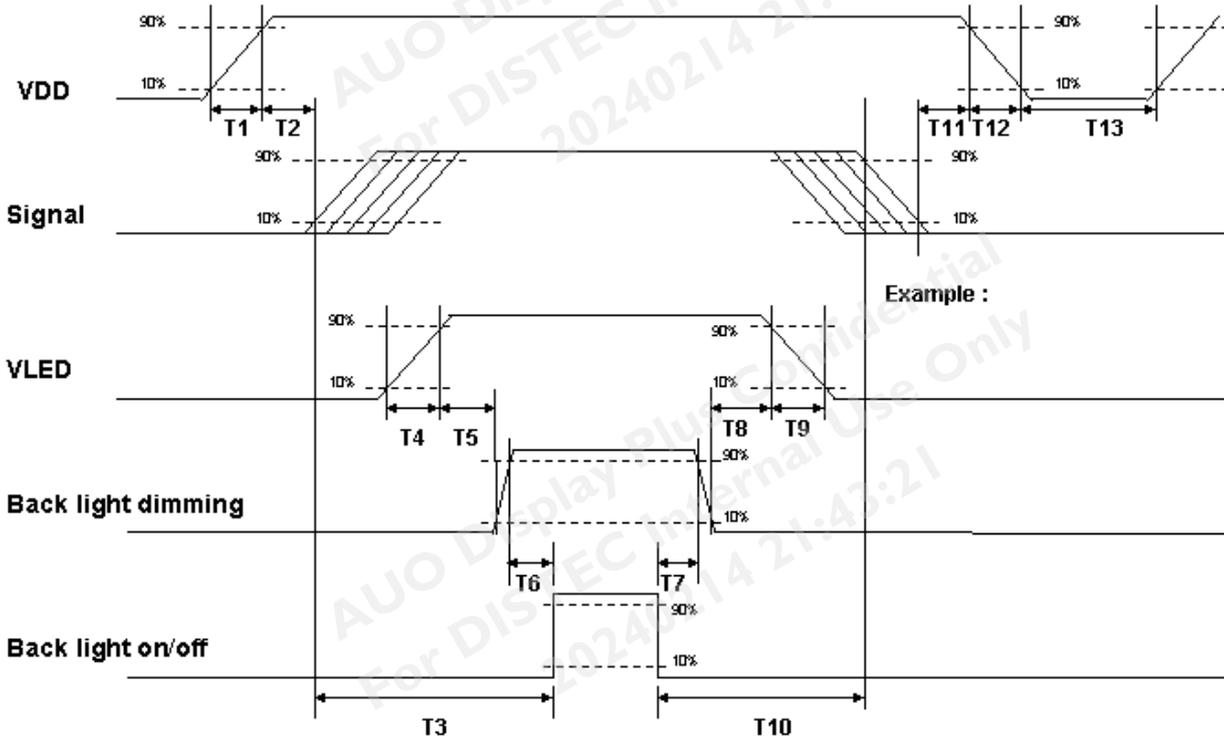

Power ON/OFF sequence timing

Parameter	Value			Units
	Min.	Typ.	Max.	
T1	0.5	--	10	[ms]
T2	30	40	50	[ms]
T3	200	--	--	[ms]
T4	0.5	--	10	[ms]
T5	10	--	--	[ms]
T6	10	--	--	[ms]
T7	0	--	--	[ms]
T8	10	--	--	[ms]
T9	--	--	10	[ms]
T10	110	--	--	[ms]
T11	0	16	50	[ms]
T12	--	--	10	[ms]
T13	1000	--	--	[ms]

The above on/off sequence should be applied to avoid abnormal function in the display. Please make sure to turn off the power when you plug the cable into the input connector or pull the cable out of the connector.



AUO Display+


7. Connector & Pin Assignment

Physical interface is described as for the connector on module. These connectors are capable of accommodating the following signals and will be following components.

7.1 TFT LCD Module: LVDS Connector

Connector Name / Designation	Interface Connector / Interface card
Manufacturer	P-TWO or compatible
Type Part Number	P-TWO (AL230F-A0G1D-P) or equivalent
Mating Housing Part Number	FI-X30HL (JAE) or compatible

Pin#	Signal Name	Pin#	Signal Name
1	RxOIN0-	2	RxOIN0+
3	RxOIN1-	4	RxOIN1+
5	RxOIN2-	6	RxOIN2+
7	GND	8	RxOCLKIN-
9	RxOCLKIN+	10	RxOIN3-
11	RxOIN3+	12	RxEIN0-
13	RxEIN0+	14	GND
15	RxEIN1-	16	RxEIN1+
17	GND	18	RxEIN2-
19	RxEIN2+	20	RxECLKIN-
21	RxECLKIN+	22	RxEIN3-
23	RxEIN3+	24	GND
25	NC	26	NC
27	NC	28	VDD
29	VDD	30	VDD

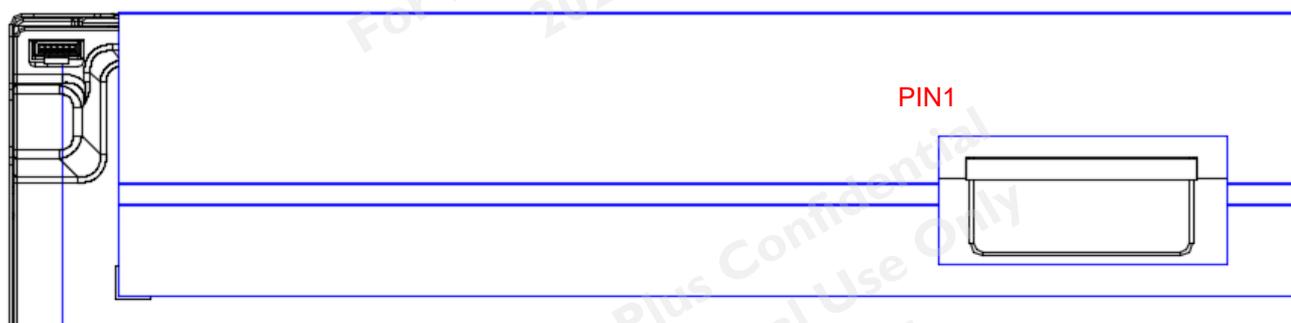



AUO Display+

8. Reliability Test

Environment test conditions are listed as following table.

Items	Required Condition	Note
Temperature Humidity Bias (THB)	Ta= 50°C, 80%RH, 300hours	
High Temperature Operation (HTO)	Ta= 80°C, 300hours	
Low Temperature Operation (LTO)	Ta= -30°C, 300hours	
High Temperature Storage (HTS)	Ta= 80°C, 300hours	
Low Temperature Storage (LTS)	Ta= -30°C, 300hours	
Vibration Test (Non-operation)	Acceleration: 1.5 Grms Wave: Random Frequency: 10 - 200 Hz Duration: 30 Minutes each Axis (X, Y, Z)	
Shock Test (Non-operation)	Acceleration: 50 G Wave: Half-sine Active Time: 20 ms Direction: ±X, ±Y, ±Z (one time for each Axis)	
Drop Test	Height: 61 cm, package test	
Thermal Shock Test (TST)	-20°C/30min, 60°C/30min, 100 cycles	1
On/Off Test	On/10sec, Off/10sec, 30,000 cycles	
ESD (Electro Static Discharge)	Contact Discharge: ± 8KV, 150pF(330Ω) 1sec, 15 points, 25 times/ point.	2
	Air Discharge: ± 15KV, 150pF(330Ω) 1sec 15 points, 25 times/ point.	

Note 1: The TFT-LCD module will not sustain damage after being subjected to 100 cycles of rapid temperature change. A cycle of rapid temperature change consists of varying the temperature from -20°C to 60°C, and back again. Power is not applied during the test. After temperature cycling, the unit is placed in normal room ambient for at least 4 hours before power on.

Note2: According to EN61000-4-2, ESD class B: Some performance degradation allowed. No data lost Self-recoverable. No hardware failures.

Note 3:

- a. Water condensation is not allowed for each test items.
- b. Each test is done by new TFT-LCD module. Don't use the same TFT-LCD module repeatedly for reliability test.
- c. The reliability test is performed only to examine the TFT-LCD module capability.
- d. To inspect TFT-LCD module after reliability test, please store it at room temperature and room humidity for 24 hours at least in advance.
- e. No function failure occurs.

Product Specification

G215HVN01.4



AUO Display+

f. Mura shall be ignored after high temperature reliability test.

AUO Display Plus Confidential
For DISTEC Internal Use Only
20240214 21:43:21


AUO Display Plus Confidential
For DISTEC Internal Use Only
20240214 21:43:21

AUO Display Plus Confidential
For DISTEC Internal Use Only
20240214 21:43:21

AUO Display Plus Confidential
For DISTEC Internal Use Only
20240214 21:43:21



9. Mechanical Characteristics

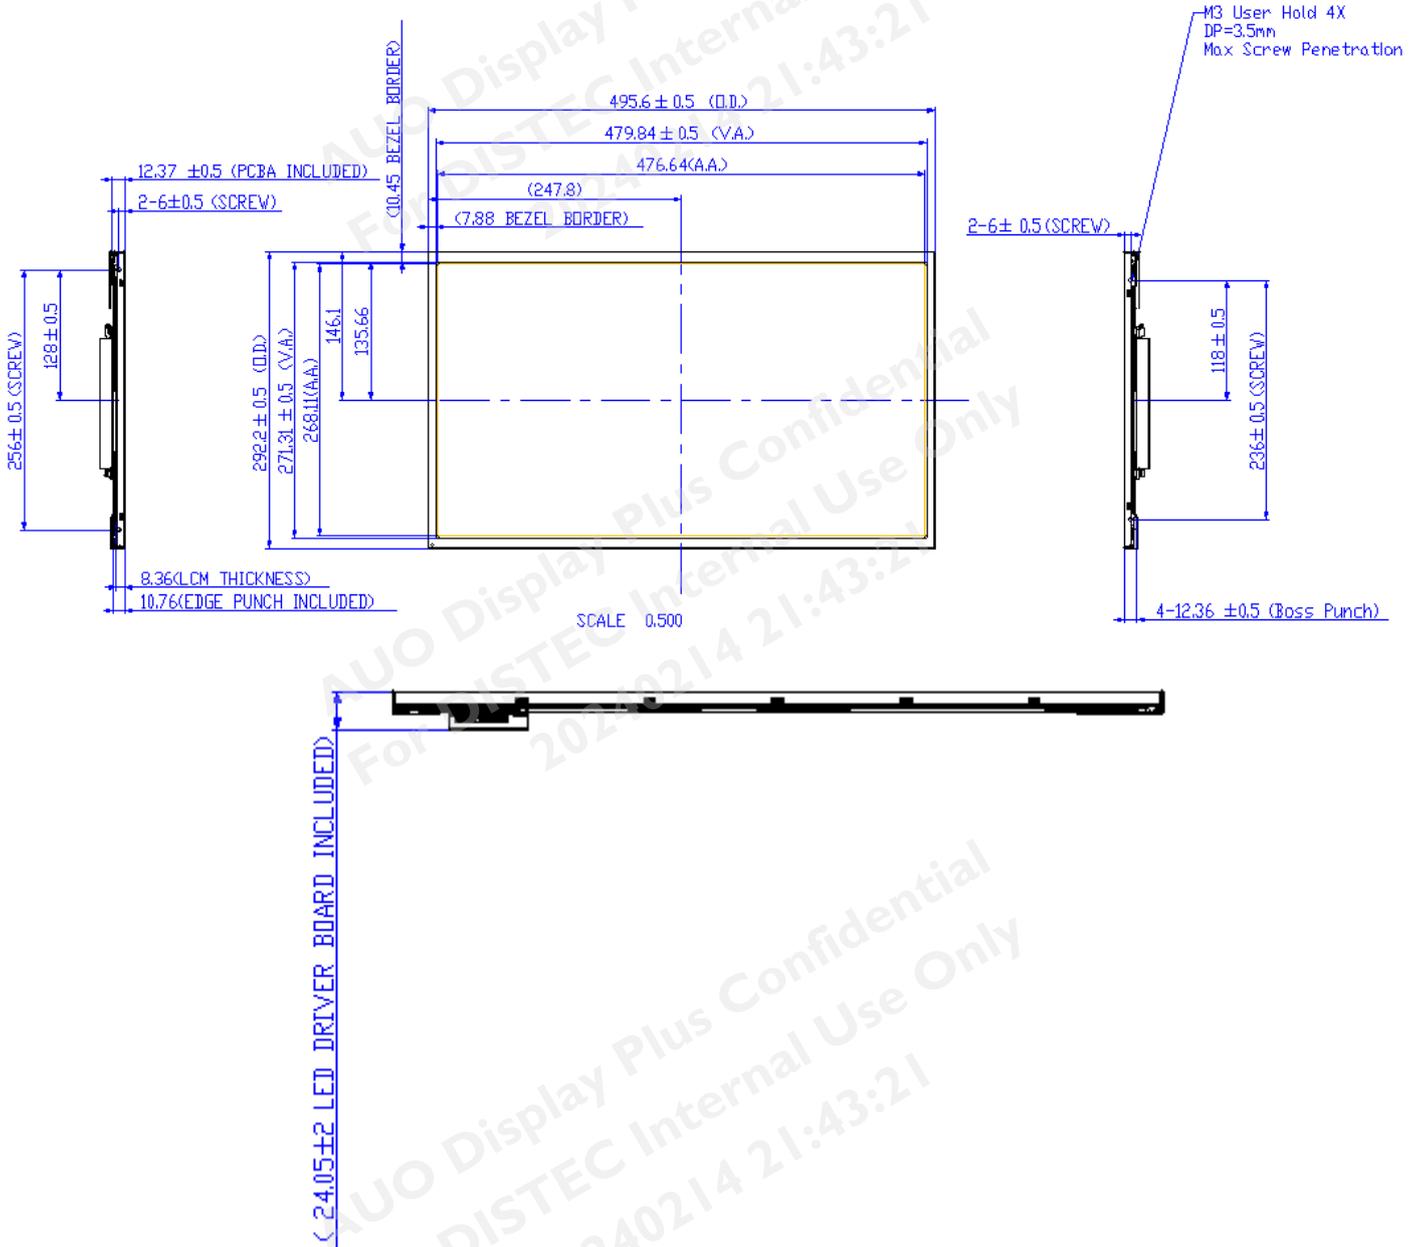


Product Specification

G215HVN01.4



AUO Display+

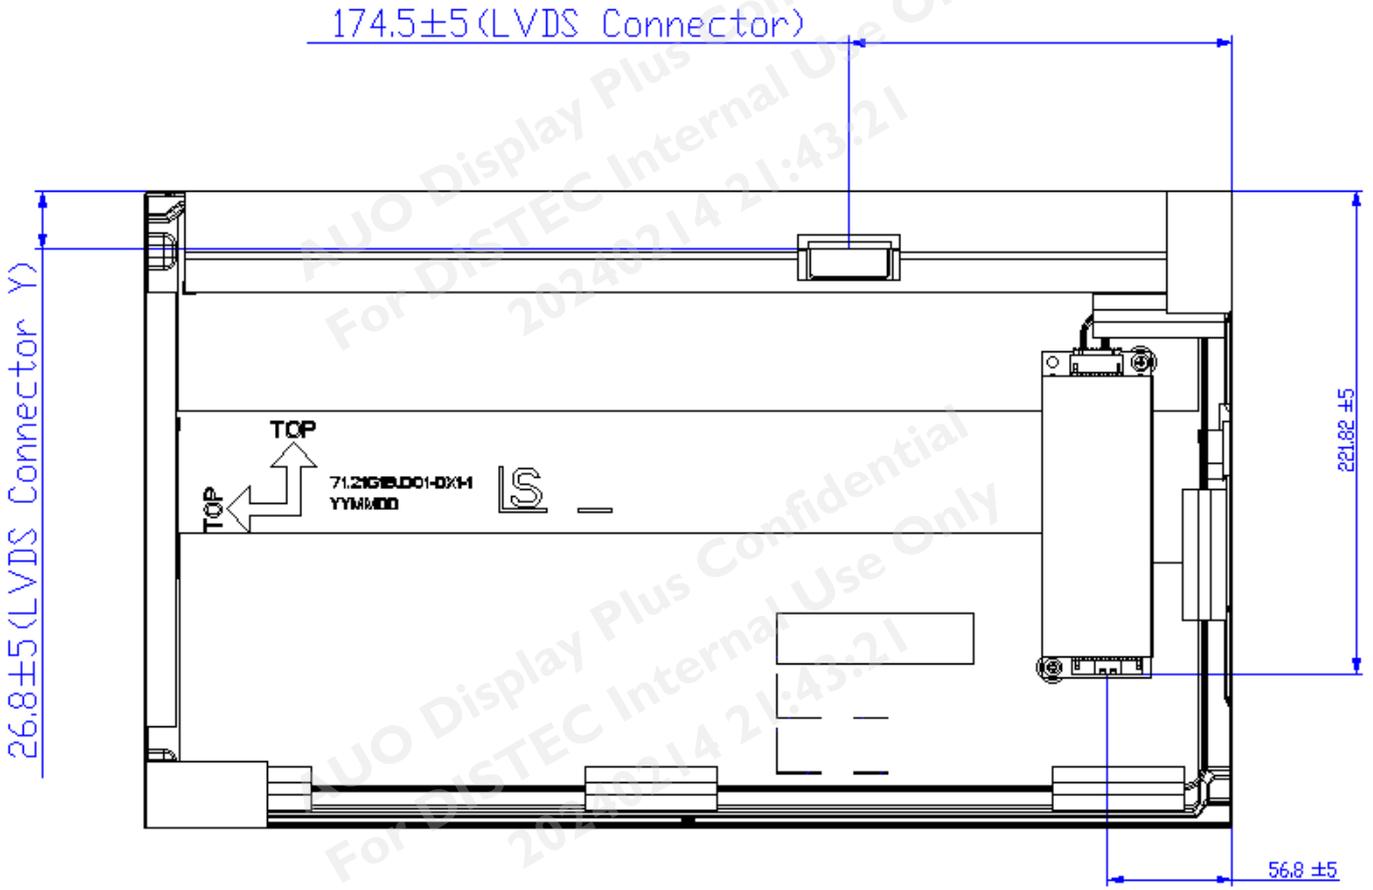



10. Label and Packaging

10.1 Shipping Label (on the rear side of TFT-LCD display)






10.2 Carton Package

靜電袋包裝方式 Module insert into anti-static bag

手动包装:

1. 取静电袋(79.21G01.001);
2. 把 module 短边先插入静电袋开口;
3. 开口处多余的静电袋折向模组背面
4. 贴封口胶带



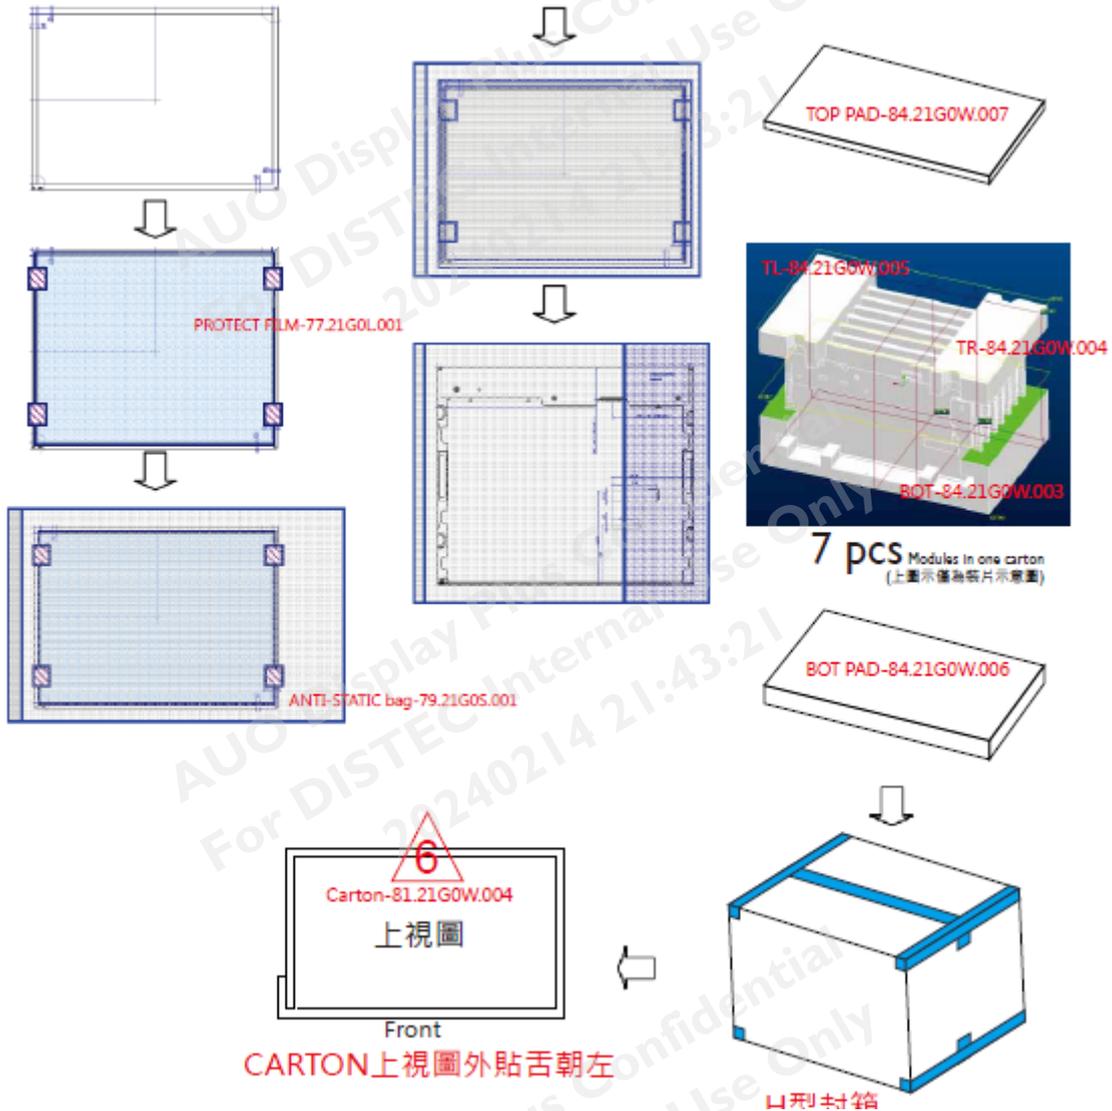

Max capacity : 7 pcs per carton

Max weight: 30.9 kg per carton

Outside dimension of carton: 602mm*372mm*367mm

Pallet size : 1280mm*1150mm*132mm


10.3 Carton Label

Product Specification


G215HVN01.4



AUO Display+

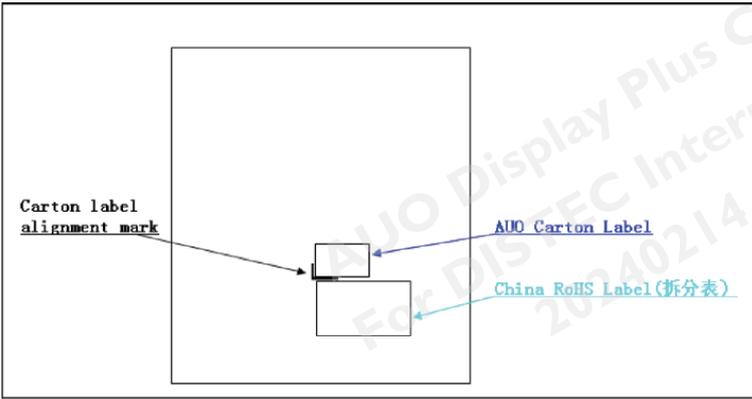


※貼附於紙箱右面L角標註位置

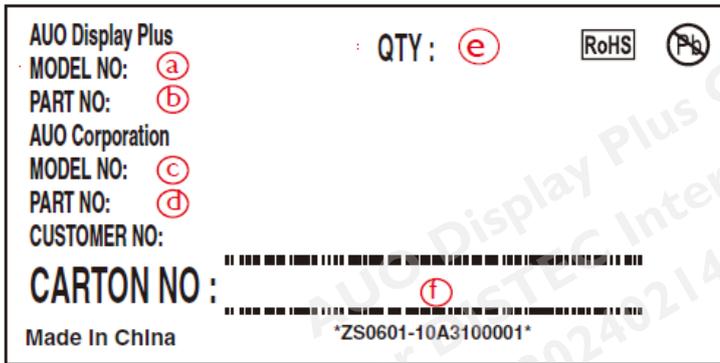

Carton NO:

****ZS0601-11A3100001*

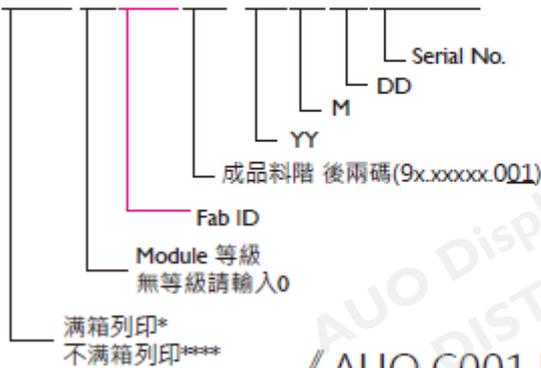

《AUO C001 Barcode Carton》

Part No.	Model Name
97D21G01.400	G215HVN01.4



AUO Display+

11. Safety

11.1 Sharp Edge Requirements

There will be no sharp edges or comers on the display assembly that could cause injury.

11.2 Materials

11.2.1 Toxicity

There will be no carcinogenic materials used anywhere in the display module. If toxic materials are used, they will be reviewed and approved by the responsible AUO toxicologist.

11.2.2 Flammability

All components including electrical components that do not meet the flammability grade UL94-V1 in the module will complete the flammability rating exception approval process.

The printed circuit board will be made from material rated 94-V1 or better. The actual UL flammability rating will be printed on the printed circuit board.

11.3 Capacitors

If any polarized capacitors are used in the display assembly, provisions will be made to keep them from being inserted backwards.

11.4 National Test Lab Requirement

The display module will satisfy all requirements for compliance to:

UL 1950, First Edition

U.S.A. Information Technology Equipment

FORTEC GROUP

Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

FORTEC GROUP

FORTEC Elektronik AG | Augsburgener Straße 2b | 82110 Germering
+49 89 894450-0
info@fortecag.de | www.fortecag.de

FORTEC INTEGRATED

FORTEC Integrated GmbH | Augsburgener Straße 2b | 82110 Germering
+49 89 894363-0
info@fortec-integrated.de | www.fortec-integrated.de

FORTEC POWER

FORTEC Power GmbH | Lise-Meitner-Straße 3 | 64560 Riedstadt
+49 6158 8285-0
weborder@fortec-power.de | www.fortec-power.de

FORTEC UNITED KINGDOM

FORTEC Technology UK Ltd. | Osprey House | 1 Osprey Court
Hinchingsbrooke Business Park | Huntingdon | Cambridgeshire | PE29 6FN
+44 1480 411600 | info@fortec.uk | www.fortec.uk

FORTEC UNITED STATES

FORTEC United States, Corp. | 87 Raynor Avenue Unit 1 | Ronkonkoma
NY | 11779 | +1 631 5804360
info@fortec.us | www.fortec.us

FORTEC CZECH REPUBLIC

FORTEC Czech Republic s.r.o. | Přátelství 275 | 330 02 Dýšina
+49 89 894363-0
info@fortec.cz | www.fortec.cz

FORTEC SWITZERLAND

FORTEC Switzerland AG | Bahnhofstraße 3 | 5436 Würenlos
+41 44 7446111
info@fortec.ch | www.fortec.ch

FORTEC EGYPT

FORTEC Electronic Design and Solution Egypt SMLC | Linx Business Park
Unit B318 | Smart Village | Giza Governorate
+20 120 1146222 | info@fortec.eg | www.fortec.eg



Nottrot B.V. | A FORTEC GROUP Member
Everdenberg 79
4902 TT Osterhout | North Brabant
+31 162 515458
info@nottrot.nl | www.nottrot.com