




NCS01W8 SERIES

3.3-16.8 WATT

NON ISOLATED DC-DC CONVERTER

Features

- Efficiency Up to 95%
- Regulated Outputs
- Fully Protected (OCP/OTP/UVLO)
- Operating Ambient Temperature -40 to +105°C
- 0.48"x0.34"x0.69" Size Pin Compatible with LMxx Linear Regulators (SIP-3)
- EN 55032 Compliant with External Circuits
- Safety Meets IEC/EN/UL 62368-1

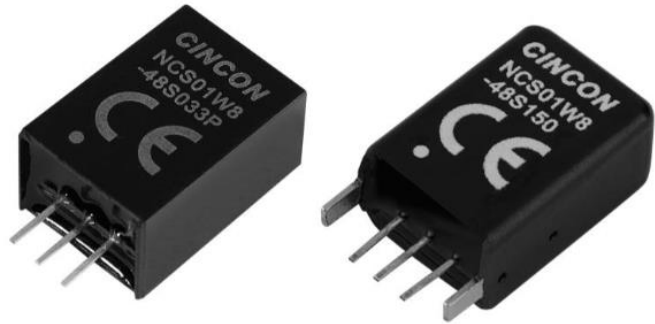

MODEL NUMBER	INPUT VOLTAGE	OUTPUT VOLTAGE	OUTPUT CURRENT		INPUT CURRENT		% EFF.		CAPACITOR LOAD MAX.
			MIN.	MAX.	NO LOAD	FULL LOAD	24V VIN	48V VIN	
NCS01W8-48S033	6-72 VDC	3.3 VDC	0 mA	1000 mA	0.5 mA	56 mA	84	82	3300uF
NCS01W8-48S050	8-72 VDC	5 VDC	0 mA	1000 mA	0.5 mA	121 mA	88	86	3300uF
NCS01W8-48S090	12-72 VDC	9 VDC	0 mA	1000 mA	0.5 mA	208 mA	92	90	1500uF
NCS01W8-48S120	15-72 VDC	12 VDC	0 mA	1000 mA	0.5 mA	275 mA	93	91	1000uF
NCS01W8-48S150	18-72 VDC	15 VDC	0 mA	1000 mA	0.5 mA	340 mA	94	92	680uF
NCS01W8-48S240	28-72 VDC	24 VDC	0 mA	700 mA	0.5 mA	369 mA	--	95	330uF

NOTE:

1. For input voltages higher than 50V_{dc}, a 33uF/100V input capacitor is required.

PART NUMBER

Series	Nominal Input Voltage	Number of Outputs	Nominal Output Voltage	Shell Material
NCS01W8	II	O	XXX	X
NCS01W8	48 : 48 VDC	S : Single	033 : 3.3VDC 050 : 5VDC 090 : 9VDC 120 : 12VDC 150 : 15VDC 240 : 24VDC	Blank : Metal P : Plastic

Part Number Example:

NSC01W8-48S05: 5W, 9:1 8-72Vdc Input, Single 5Vdc Output



NCS01W8 Series

TECHNICAL SPECIFICATIONS

(All specifications are typical at nominal input, full load at 25°C unless otherwise noted.)

ABSOLUTE MAXIMUM RATINGS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Input Voltage	Continuous	All	-0.3		72	V _{dc}
Input Surge Voltage	100ms max.	All			100	V _{dc}
Operating Temperature	With de-rating	All	-40		105	°C
Operating Case Temperature	At the center part of case plate	All			110	°C
Storage Temperature		All	-55		125	°C
Thermal Impedance	*Thermal test condition with vertical direction mounted on a PCB with 2oz copper and 1.6mm thickness	Metal Plastic		26 48		°C/W

INPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Operating Input Voltage		All	See Model Number Table			V _{dc}
Input Under Voltage Lockout						
Turn-On Voltage Threshold	100% Load	3.3V	4.8	5.2	5.8	V _{dc}
		5V	6.5	6.9	7.5	
		9V	10.2	10.9	11.7	
		12V	12.4	13.2	14.3	
		15V	15.5	16.4	17.7	
		24V	23.8	25.6	27.6	
Turn-Off Voltage Threshold	100% Load	3.3V	4.4	4.8	5.2	V _{dc}
		5V	5.8	6.4	6.9	
		9V	9.2	10.0	10.8	
		12V	11.1	12.1	13.1	
		15V	13.8	15.1	16.3	
		24V	21.3	23.2	25.1	
Maximum Input Current	V _{in} = V _{in min.} , full load	All	0.9			A
No-Load Input Current	I _o =0A, V _{in} =Nominal	All	0.5			mA
Input Filter	Capacitive	All				
Inrush Current (I ² t)	As per ETS300 132-2	All	0.1			A ² s
Input Reflected Ripple Current	V _{in} =Nominal, L=12uH, C=47uF, Load=full load	All	30			mA

OUTPUT CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Voltage Set Point Accuracy	Full load, T _c =25°C	All	-2		+2	%
Output Voltage Regulation						
Load Regulation	Full load to no load	All			±0.6	%
Line Regulation	V _{in} =High line to low line, full load	All			±0.5	%
Temperature Coefficient	T _c =-40°C to 85°C	All			±0.02	%/°C
Output Voltage Ripple and Noise (20MHz bandwidth)						
Peak-to-Peak	Full load, 1uF ceramic capacitors	All			75	mV
Output Current Range	V _{in} = 6V to 72V	See Model Number Table				A
Over Current Protection	% of I _{out} rated, hiccup mode. Auto recovery	Others 24V		165 230		%
Short Circuit Protection		All	Continuous, Auto Recovery			
External Load Capacitance	Full load (resistive)	See Model Number Table				uF



NCS01W8 Series

EFFICIENCY

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
100% Load	Full load, $T_c=25^{\circ}\text{C}$	See Model Number Table				%

DYNAMIC CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Output Voltage Current Transient						
Error Band	50% to 100% of I _{o max.} step load change d _i /d _t =0.1A/us (within 1%V _{out} nominal)	All			±3	%
Recovery Time		All			250	us
Turn-On Delay and Rise Time	Full load (constant resistive load)					
Turn-On Delay Time, From Input	V _{in min.} to 10%V _{o_set} , Power up	All		25		ms
Output Voltage Rise Time	10%V _{o_set} to 90%V _{o_set}	All		8		ms

FEATURE CHARACTERISTICS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
Switching Frequency	Pulse wide modulation	3.3V	125	185	245	KHZ
		5V	140	200	260	
		9V	168	250	333	
		12V	200	275	350	
		15V	224	320	416	
		24V	280	405	530	
Over Temperature Shutdown	Internal IC temperature, automatic recovery	All		150		$^{\circ}\text{C}$
Over Temperature Recovery		All		135		$^{\circ}\text{C}$

GENERAL SPECIFICATIONS

PARAMETER	NOTES and CONDITIONS	Device	Min.	Typ.	Max.	Units
MTBF	I _o =100% of I _{o_max} ; MIL-HDBK - 217F_Notice 1, GB, 25°C	3.3V	10447			K hours
		5V	8217			
		9V	9226			
		12V	9946			
		15V	9326			
		24V	9853			
Weight		Metal	6.8			grams
		Plastic	4.4			
Case Material	Metal & Plastic					
Potting Material	UL 94V-0					
Pin Material	Base: Copper Plating: Matte Tin					
Shock/Vibration	MIL-STD-810F Compliant					
Humidity	95% RH max. Non condensing					
Altitude	4000m Operating altitude					
Thermal Shock	MIL-STD-810F					

EMC SPECIFICATIONS (External components required, please refer to application note.)

EMI	Meets EN 55032 Compliant (with external filter)	Class A & B
Application Note Link	NCS01W8 Series App Notes	
Packaging Information Link	Packaging Information	




NCS01W8 Series

CHARACTERISTIC CURVE

Power Derating Curve


Metal shell

NCS01W8 Typical Derating Curve
(Vin=Nominal)

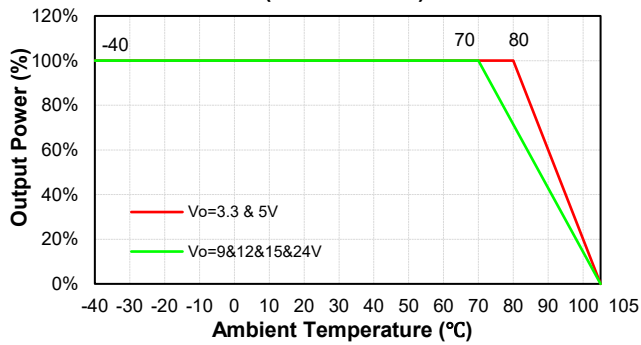


Plastic Shell

NCS01W8 Typical Derating Curve
(Vin=Nominal)

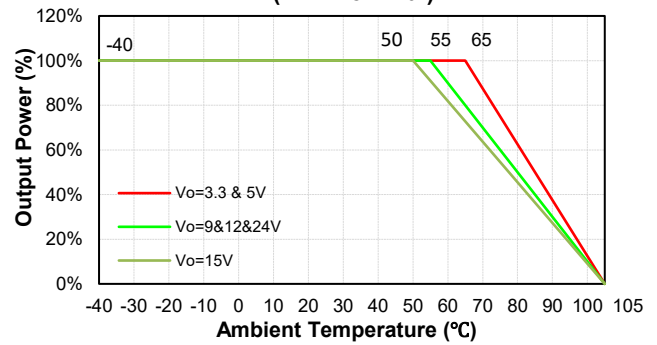


Performance Data


NCS01W8-48S033
Eff Vs Io @25 Deg. C

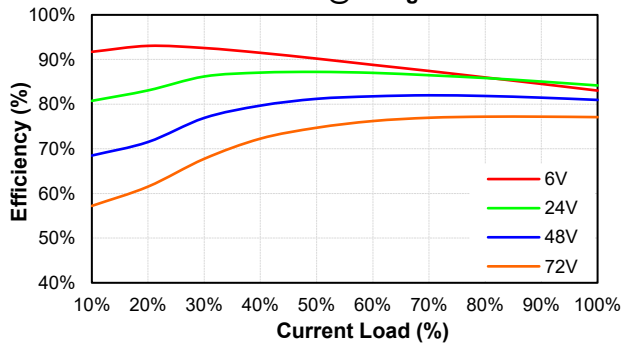


NCS01W8-48S033
Pd Vs Po @25 Deg. C

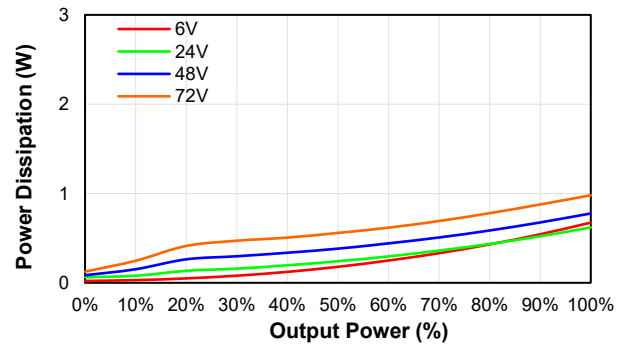

NCS01W8-48S050
Eff Vs Io @25 Deg. C

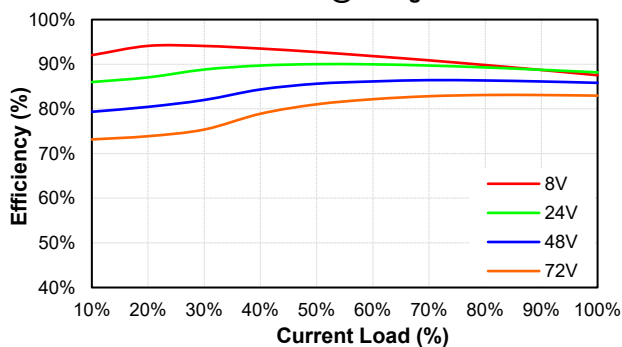


NCS01W8-48S050
Pd Vs Po @25 Deg. C

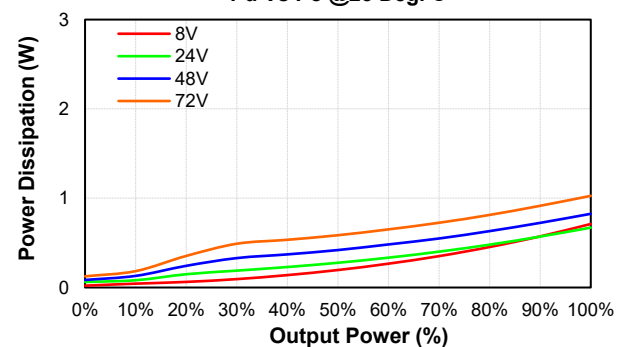




NCS01W8 Series


NCS01W8-48S090
Eff Vs Io @25 Deg. C

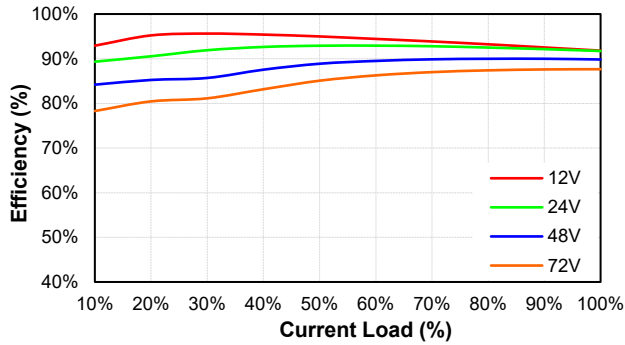


NCS01W8-48S090
Pd Vs Po @25 Deg. C

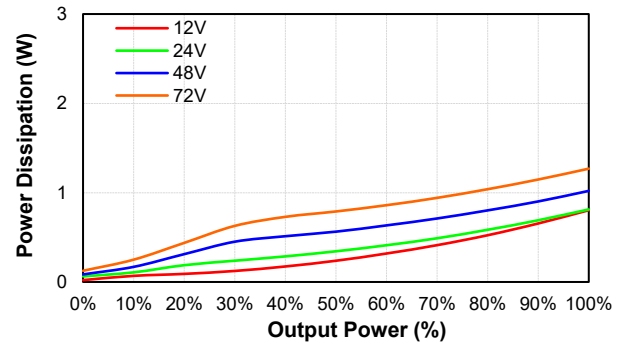


NCS01W8-48S120
Eff Vs Io @25 Deg. C

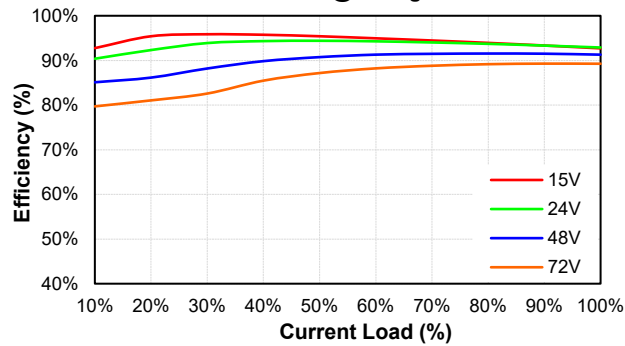


NCS01W8-48S120
Pd Vs Po @25 Deg. C

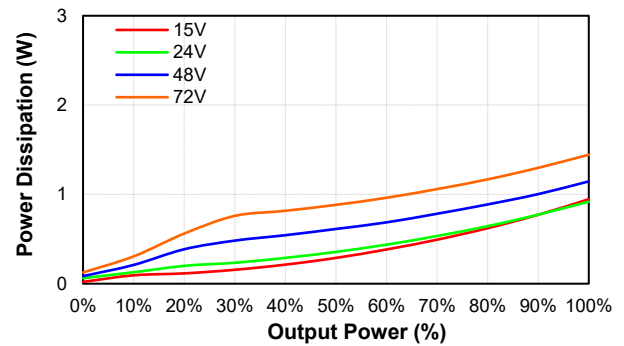


NCS01W8-48S150
Eff Vs Io @25 Deg. C

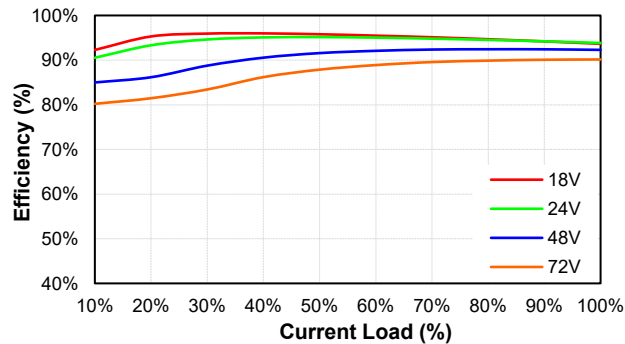


NCS01W8-48S150
Pd Vs Po @25 Deg. C

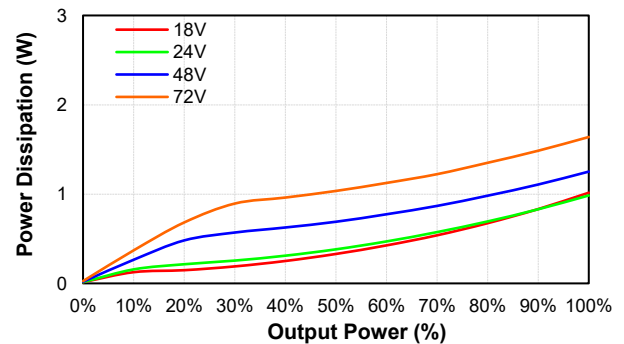

NCS01W8-48S240
Eff Vs Io @25 Deg. C

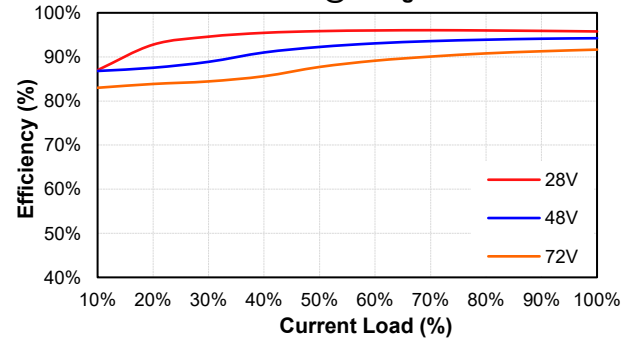

NCS01W8-48S240
Pd Vs Po @25 Deg. C

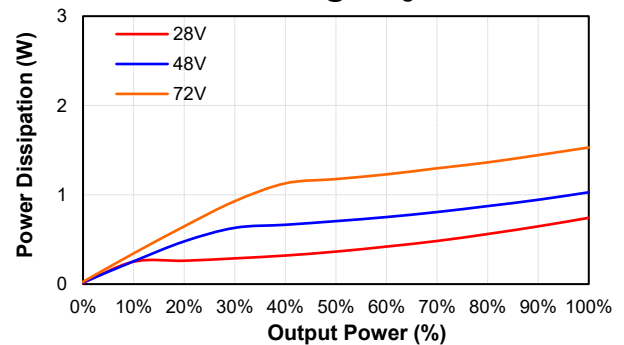




NCS01W8 Series

MECHANICAL SPECIFICATION

Metallic Shell

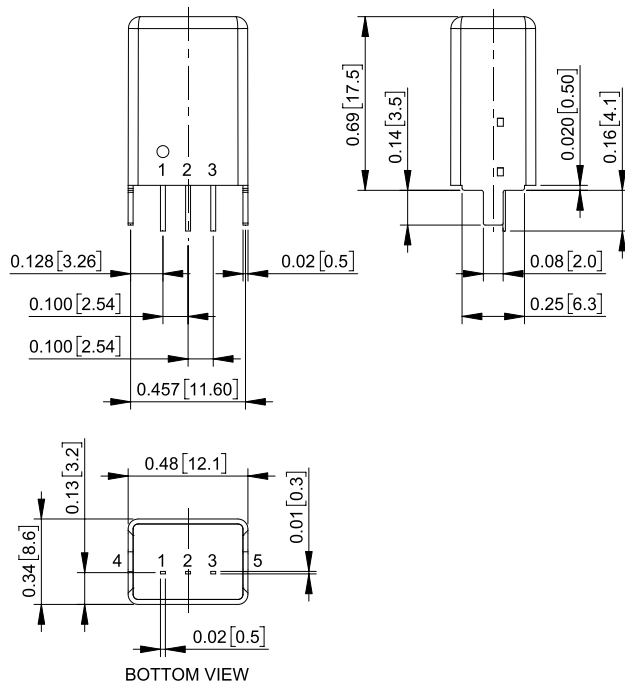


All Dimensions in Inches[mm]
Tolerance Inches: x.xx=±0.02, x.xxx=±0.010
Millimeters: x.x=±0.5, x.xx=±0.25

Pin Connection	
Pin	Function
1	+V Input
2	GND
3	+V Output
4	Case Pin
5	Case Pin

Note: Pin Size is x.xx±0.002 Inch [x.x±0.05 mm]
Pin4 & Pin5 Size is x.xx±0.004 Inch [x.x±0.10 mm]

Plastic Shell

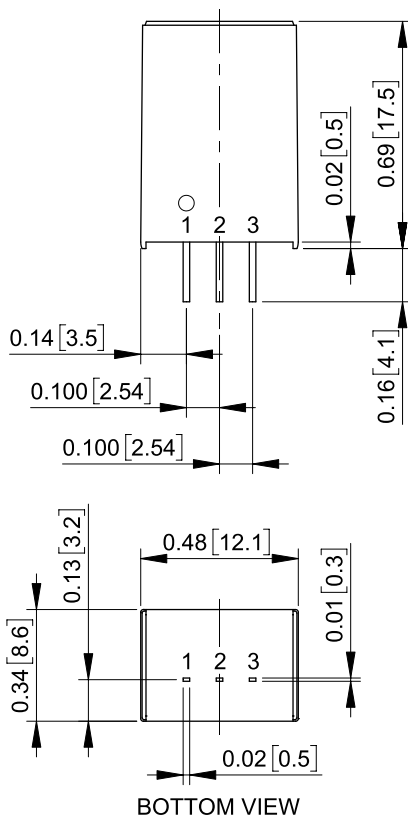

All Dimensions in Inches[mm]
Tolerance Inches: x.xx=±0.02, x.xxx=±0.010
Millimeters: x.x=±0.5, x.xx=±0.25

Pin Connection	
Pin	Function
1	+V Input
2	GND
3	+V Output

Note: Pin Size is x.xx±0.002 Inch [x.x±0.05 mm]

CINCON Electronics Co. Ltd.
Add: 14F, No. 306, Sec.4, Hsin Yi Rd., Taipei, Taiwan
Tel: 886-2-27086210
Fax: 886-2-27029852
E-mail: sales@cincon.com
Web: www.cincon.com