



**FORTEC**  
GROUP

**BLO-Line®**

Blaze load optimized monitors 31.5 inch — according to class A1

---

One partner, unlimited technology solutions

# Product Features

Designed,  
developed and  
made in Germany

Protection against fire hazard and the assessment of fire behaviour of building materials is a basic presumption when planning and constructing buildings. Public areas, which are also marked emergency exit routes within buildings must be accessible in case of fire. Flammable materials with high risk of smoke gas development must not be used or installed in those areas.

Fire safety regulations avoid the installation of devices which are supposed to increase fire load and to promote development of smoke gas. FORTEC Integrated designed and developed a monitor series optimized in the contribution to fire and smoke gas emission for usage in public areas and buildings. BLO Monitors are available with two different reaction to fire classification levels.

## BLO-Line® monitors: Safety first

The European Standard EN13501-1 enables the classification of building materials and components in terms of fire behavior and fire resistance. Additional criteria take a product's tendency to produce smoke and flaming droplets or particles into consideration. Since there is no such classification procedure for electronic devices, monitors are tested in compliance with the SBI method according to EN 13823:2015-02 standard, which specifies a method of test in order to determine the behaviour of fire performance of construc-

tion products when exposed to thermal attack by a single burning item (SBI).

The required fire test was conducted in accordance with the above mentioned standards on the premises of the Leipzig Institute for Materials Research and Testing, a recognised, notified and accredited testing, inspection and certification body in Germany. The results have been verified and certified by an independent expert. The results of the fire tests allow FORTEC Integrated to offer fire load optimized monitors in accordance with the classifications A1 (non-combustible materials - no contribution to fire).

The BLO-Line® is classified and certified according to class A1. Consequently, it meets the respective fire safety regulations. BLO-Line® monitors may be also equipped with an optional extinguishing device or even engineered for a higher IP rating. Thus, our BLO-Line® monitors are most suitable for installation as information systems in public buildings, such as hospitals, universities, schools, airports and other public areas in buildings. They are available as common monitors or as an independent system with integrated PC. Hence, there is no need for additional fire resistant housings which are both heavy in weight and more expensive. Therefore, our BLO-Line® monitors are cost-effective and allow for an easy installation and handling.



# BLO-Line® 31.5

## Fire protection according to class A1



Fördermitglied im **bvbf** FORTEC Integrated is supporting member of Bundesverband Brandschutz-Fachbetriebe e.V.  
Please also visit our website: [www.brandschutzmonitore.de](http://www.brandschutzmonitore.de)

# Panel and housing

## BLO-Line® 31.5



BLO-Line® 31.5 monitor

	Measure	Description
Panel Diagonal & Pixel class	[mm] / [Inch]	800.1/ 31.5   ISO 9241-307 (pixel error class II)
Type		BLO-Line monitor with glass and bezel
Resolution	[Pixel]	1.920 x 1.080 FHD
Luminance (center)	[cd/m²]	500
Viewing angle (U/ D/ L/ R)	[°]	89/ 89/ 89/ 89
Active area (H/V)	[mm]	698.40 x 392.85
Backlight & Number of colors	[M]	LED   16.7
Contrast ratio		3000:1
Response time (on/off)	[ms]	8
Life time back light until reaching half brightness	[h]	50.000
Continuous operating time	[h] / [d]	24/ 7
Mounting	[mm]	Wall mount included
Storage temperature	[°C] / [°F]	-20 ~ 60 / -4 ~ 140
Operating temperature	[°C] / [°F]	0 ~ 40/ 32 ~ 104
Storage & Operation humidity	[%]	10 ~ 90 (non condensing)
Panel orientation		Landscape and Portrait (option)
Location of connectors and OSD buttons		Landscape and portrait mode: backside middle
Housing		Powdered steel sheet, black RAL 9005
Glass		Fire protection glass, 7 mm
Power supply	[V]	AC 110-240/ 50-60 Hz
Weight	[kg]	22.0
Dimension (W x H x D)	[mm]	752 x 442 x 83
Conformity		CE, FCC Class A, EU-RoHS, A1 according to EN13501-1
Packaging		Single packaging for cargo pallet (max. 3 packages p.p.)
Package Contents		Safety instructions, power cable DB-07-607, BLO-Line® certificate

All figures are typical values. The real values of the panel may vary. The optical characteristics are determined after the panel has been „ON“ for approximately 30 minutes at an ambient temperature of 25° C (77° F).


Life time of the backlight is defined as the time to take until the brightness reduces to 50% of its original value.

# Video PME - VGA, HDMI, DisplayPort




Order number		DS-92-058
Interfaces		1 x VGA, 1 x HDMI, 1 x DisplayPort, 1 x Audio Line-Out, 1 x USB-Remote
Power consumption (typ.)	[Watt]	44

# BLO-Line® 31.5

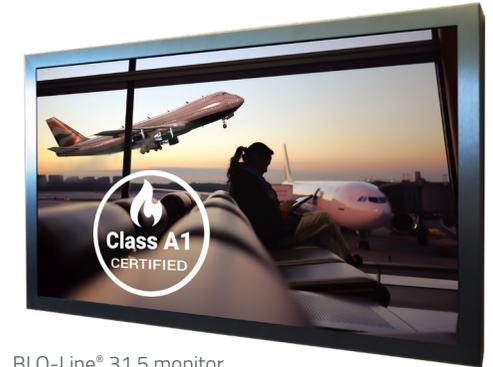

BLO-Line® 31.5 monitor

# VideoPoster - Multimedia Networkplayer

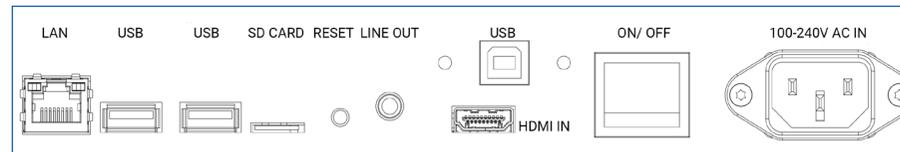


Order number		DS-92-123
Interfaces		1 x LAN, 2 x USB,, 1 x HDMI, 1 x Audio Line-Out, 1 x MicroSD card slot
Power consumption (typ.)	[Watt]	43



BLO-Line® 31.5 monitor backside

# WebPoster M3 - Website Player

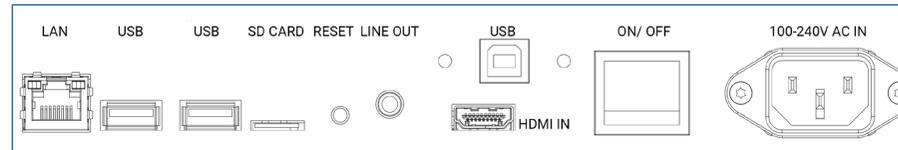



## BLO-Line® 31.5

WebPoster M3 is an industrial FHD network player to show websites. It is a special designed FORTEC Integrated O/S for Artista IOT monitors.

Firmware is compatible with touchscreen applications.


Order number		DS-92-221
Interfaces		1 x LAN, 2 x USB,, 1 x HDMI, 1 x Audio Line-Out, 1 x MicroSD card slot
Raspberry® PI		CM3+, CM 4, 32 GB
Power consumption (typ.)	[Watt]	43

# IOT - Raspberry® IoT Controller

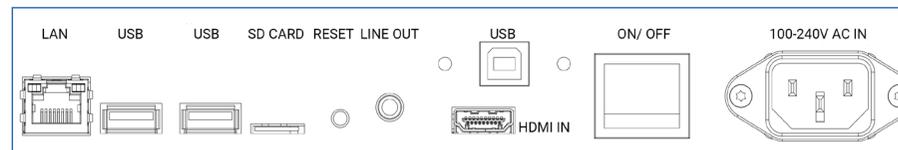

Order number		DS-92-074
Interfaces		1 x LAN, 2 x USB,, 1 x HDMI, 1 x Audio Line-Out, 1 x MicroSD card slot
Raspberry® PI		CM3+, CM 4, 32 GB
Power consumption (typ.)	[Watt]	43

# PC Intel® - Atom™

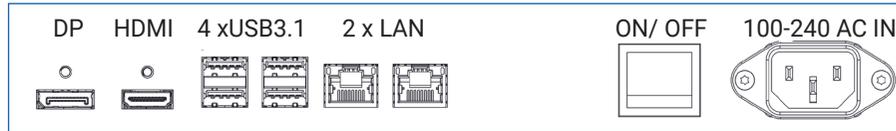

Order number		DS-92-052
Interfaces		1 x DP, 1 x HDMI, 2x Ethernet RJ45, 4x USB 3.0
PC		CPU: Intel® Atom™ x7-E3950 Quad-Core (4x 1.6/2.0 GHz), RAM: 8 GB DDR3L, Storage: min. 128 GB M.2 SATA
Fan		no
Power consumption (typ.)	[Watt]	55

## Options

Order number	DS-92-131	Touch monitor with Prisma Media Eco
	DS-92-152	Touch monitor with IQ Atom™
	DS-92-153	Touch monitor with Raspberry® IoT
	DS-92-214	Touch monitor with WebPoster M3
Touch technology		PCAP touch, projected capacitive
Glass		Fire protection glass 6.5 mm
Can be combined with		—

## BLO-Line® 31.5

### Touch integrated



BLO-Line® 31.5 monitor with touch screen

# Options

## BLO-Line® 31.5

Product	Order no.	Product description
Extinguishing cartridge	DS-92-079	Higher safety in cases of fire for all versions of BLO-Line®
BLO-Line® A1, Portrait mode	AP-01-148	Information order number if the usage will be in portrait mode, for all versions of BLO-Line®
Bezel with cable feedthrough	DS-92-107	Front bezel with outlet for cable feed BLO-Line® 31.5, to cover the cable connections

## Additional

# Accessories

Product	Order no.	Product description
WIN 10 IOT Atom™	DS-60-899	Embedded operation system 2019 LTSC

## Software

Windows 10 IoT Enterprise is a full version of Windows 10 that provides enterprise manageability and security for embedded devices and IoT solutions such as medical devices, industrial automation, measurement systems, and more. It's a binary equivalent of Windows 10 Enterprise, so you can use the same familiar development and management tools as you would on client PCs and laptops. The embedded version of Windows 10 IoT Enterprise is supported by Microsoft for at least 10 years.

Copyright 2024 FORTEC Integrated. Information in the document is subject to change without prior notice.

Our corporate network supports you worldwide with offices in Germany, Austria, Switzerland, Great Britain and the USA.  
For more information please contact:

# Contact

---

## FORTEC GROUP

**FORTEC Elektronik AG** | Augsburg Str. 2b | 82110 Germering  
+49 89 894450-0  
info@fortecag.de | [www.fortecag.de](http://www.fortecag.de)

---

## FORTEC INTEGRATED

**DISTEC GmbH** | Augsburg Str. 2b | 82110 Germering  
+49 89 894363-0  
info@distec.de | [www.distec.de](http://www.distec.de)

## FORTEC POWER

**AUTRONIC Steuer und Regeltechnik GmbH** | Siemensstraße 17 |  
74343 Sachsenheim  
+49 7147 24-0  
vertrieb@autronic.de | [www.autronic.de](http://www.autronic.de)

**EMTRON electronic GmbH** | Lise-Meitner-Straße 3 | 64560 Riedstadt  
+49 6158 8285-0  
weborder@emtron.de | [www.emtron.de](http://www.emtron.de)

## FORTEC CZECH REPUBLIC

**FORTEC Czech Republic s.r.o.** | Přátelství 275 | 330 02 Dýšina  
+42 0377 845878  
alltronic@alltronic-sro.cz | [www.alltronic-sro.cz](http://www.alltronic-sro.cz)

## FORTEC SWITZERLAND

**FORTEC Switzerland AG** | Bahnhofstraße 3 | 5436 Würenlos  
+41 44 7446111  
info@altrac.ch | [www.altrac.ch](http://www.altrac.ch)

## FORTEC UNITED KINGDOM

**FORTEC Technology UK Ltd.** | Osprey House | 1 Osprey Court  
Hinchingbrooke Business Park | Huntingdon | Cambridgeshire | PE29 6FN  
+44 1480 411600  
info@displaytechnology.co.uk | [www.displaytechnology.co.uk](http://www.displaytechnology.co.uk)



**Apollo Display Technologies, Corp.** | 87 Raynor Avenue Unit 1 | Ronkonkoma  
NY | 11779  
+1 631 5804360  
info@apollodisplays.com | [www.apollodisplays.com](http://www.apollodisplays.com)