

# **Datasheet**

# **AUO**

P320HVN04.6

UP-02-269















The information contained in this document has been carefully researched and is, to the best of our knowledge, accurate. However, we assume no liability for any product failures or damages, immediate or consequential, resulting from the use of the information provided herein. Our products are not intended for use in systems in which failures of product could result in personal injury. All trademarks mentioned herein are property of their respective owners. All specifications are subject to change without notice.



# Model Name: P320HVN04.6

Issue Date: 2023/08/03

( )Preliminary Specifications

(\*)Final Specifications

Customer Sign	ature	Date	AUO Display Plus	Date
Approved By	For Di	20231	Approval By PM Director CT Wu	TWu*
Note		alay P'	2(1/10)	ny Chen
			Reviewed By Project Leader  Wayne Liu	传教
			Prepared By PM  Wallace Lin	220



## Contents

	eral Description	
2 Abs	olute Maximum Ratings	6
3 Opti	ical Specification	7
4 Inte	rface Specification	10
	4.1 Input power	
•	4.2 Input Connection	11
•	4.3 Input Data Format	13
	4.3.1 LCD Pixel Format	13
	4.3.2 LVDS Data Format	
	4.3.3 Color Input Data Reference	14
5 Sigr	nal Timing Specification	15
;	5.1 Input Timing	
	5.1.1 Timing table	15
	5.1.2 Signal Timing Waveform	16
	5.2 Input interface characteristics	17
	5.2.1 LVDS spec	17
	5.3 Power Sequence for LCD	20
6 Bac	klight Specification	21
(	6.1 Electrical specification	21
	6.2 Input Pin Assignment	
(	6.3 Power Sequence for Backlight	23
	hanical Characteristics	
8 Reli	ability Test Items	27
	rnational Standard	
,	9.1 Safety	28
	9.2 EMC	
	cking	
	10.1 Definition of Label	29
	10.2 Packing Methods	30
	10.3 Pallet and Shipment Information	31
11 Pre	ecautions	32
	11.1 Mounting Precautions	
	11.2 Operating Precautions	32
	11.3 Operating Condition for Public Information Display	
	11.4 Electrostatic Discharge Control	33
	11.5 Precautions for Strong Light Exposure	33
	11.6 Storage	34
	11.7 Handling Precautions for Protection Film	
	11.8 Dust Resistance	



## **Record of Revision**

ersion	Date	Page	Description
0.0	2023/02/17	All	1st release
0.1	2023/03/20	P21	Cancel DET function, revise BLU power.
		P22	Revise Pin 11 as N.C.
		P24	Update weight.
1.0	2023/07/18	P1	1 <sup>st</sup> Final spec version
1.1	2023/08/03	P29	Revise label form



## 1 General Description

This specification applies to the 31.5 inch Color TFT-LCD Module P320HVN04.6. This LCD module has a TFT active matrix type liquid crystal panel 1920 x 1080 pixels, and diagonal size of 31.5 inch. This module supports 1920 x 1080 mode. Each pixel is divided into Red, Green and Blue sub-pixels or dots which are arranged in vertical stripes. Gray scale or the brightness of the sub-pixel color is determined with a 8-bit gray scale signal for each dot. Special materials applied into this model are:

- 1. Liquid crystal: Advanced wide temperature LC (-40°C~110°C)
- 2. Polarizer: Wide temperature polarizer (95°C)

P320HVN04.6 has been designed to apply the 2 channel LVDS interface method. It is intended to support displays where high brightness, wide viewing angle, high color saturation, and high color depth are very important. Advanced wide temperature Liquid Crystal (-40~110°C) is also applied on this model to enhance the sunlight readability.

#### \* General Information

Items	Specification	Unit	Note
Active Screen Size	31.5	inch	
Display Area	698.4 (H) x 392.85(V)	mm	
Outline Dimension	719.2(H ) x 413.7(V) x 25.7 (D)	Mm	D: front bezel to D/B cover
Bezel Opening	703.4(H) x 397.9(V)	mm	
Bezel Width	7.9/7.9/7.9	mm	U/D/L/R
Front Bezel Surface finish	SECC	410	
Driver Element	a-Si TFT active matrix	Sin	d
Display Colors	8 bit(16.7 million)	Colors	~ p
Number of Pixels	1920x1080	Pixel	
Pixel Pitch	0.3637 (H) x 0.3637 (W)	mm	
Pixel Arrangement	RGB vertical stripe		
Display Operation Mode	Normally Black		
Sunglasses Readability	Landscape Mode		Note 3
Surface Treatment	Anti-Glare, 3H		Haze 28%
Rotate Function	Unachievable		Note 1
Display Orientation	Portrait/Landscape Enabled		Note 2
Operating Time	24/7	tia	See Chapter 11.3 for details
Frame Rate	60	Hz	See Chapter 5.1 for details
LED MTTF	50K	hours	See Chapter 6.1 for details





#### Note 1

Rotate Function refers to LCD display could be able to rotate. This function does not work in this model.


#### Note 2

- (1) Landscape Mode: The default placement is T-Con on the upside and the image is shown upright via viewing from the front.
- (2) Portrait Mode: The default placement is that T-Con side has to be placed on the right side via viewing from the front.





#### Portrait (Front view)



#### Note 3

The image can be seen via polarized sunglasses while this panel is placed in landscape mode.

#### **Display Orientation:**



Landscape



Portrait



Display Plus Confidential



## 2 Absolute Maximum Ratings

The followings are maximum values which, if exceeded, may cause faulty operation or damage to the unit


Item	Symbol	Min	Max	Unit	Conditions
Logic/LCD Drive Voltage	Vcc	-0.3	14	[Volt]	Note 1
Input Voltage of Signal	Vin	-0.3	4	[Volt]	Note 1
Operating Temperature	ТОР	0	+50	[°C]	Note 2
Operating Humidity	НОР	10	90	[%RH]	Note 2
Storage Temperature	TST	—20	+60	[°C]	Note 2
Storage Humidity	HST	10	90	[%RH]	Note 2
Panel Surface Temperature	PST		65	[°C]	

Note 1

Duration:50 msec.

#### Note 2

Maximum Wet-Bulb should be 39°C and No condensation. The relative humidity must not exceed 90% non-condensing at temperatures of 40°C or less. At temperatures greater than 40°C, the wet bulb temperature must not exceed 39°C.

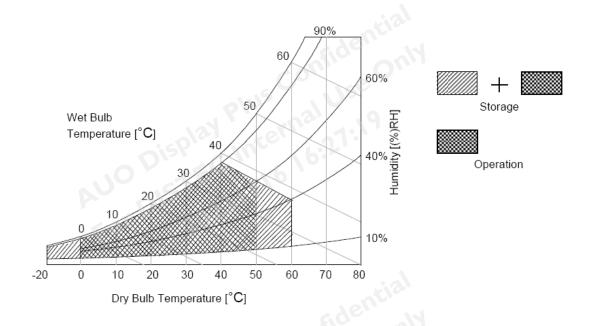



## **3 Optical Specification**

Optical characteristics are determined after the unit has been 'ON' and stable for approximately 45 minutes in a dark environment at 25°C. The values specified are at an approximate distance 500 mm from the LCD surface at a viewing angle of  $\varphi$  and  $\theta$  equal to  $0^\circ$ .

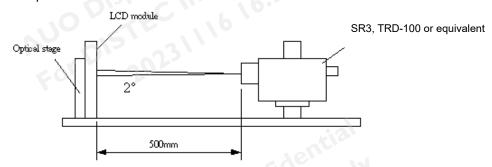


Fig. 1 Presents additional information concerning the measurement equipment and method.

_	Parameter		Values			1.126	N	
Parame	iter	Symbol	Min.	Тур.	Max	Unit	Notes	
Contrast Ratio		CR	3200	4000			1	
Surface	Luminance (White)	Lwh	1200	1500		cd/m <sup>2</sup>	2	
Luminar	nce Variation	<b>б</b> wніте(9Р)			1.33		3	
Respon	se Time (G to G)	Тү		8	10	ms	4	
Color G	amut	NTSC		72		%		
Gamma	l	Gma	1.9	2.2	2.5			
Color C	oordinates			adell	M			
	Red	R <sub>X</sub>	6.0	0.657				
		Ry	1115	0.336				
	Green	G <sub>X</sub>	100	0.319	-			
		Gy	T 0.02	0.629	T 10.02			
	Blue	Bx	Typ0.03	0.151	- Typ.+0.03			
		By		0.066				
	White	Wx		0.313				
		WY		0.329				
Viewing	Angle						5	
	x axis, right(φ=0°)	θr	85	89		degree		
	x axis, left(φ=180°)	θι	85	89		degree		
	y axis, up(φ=90°)	$\theta_{u}$	85	89		degree		
	y axis, down (φ=270°)	θ <sub>d</sub>	85	89		degree		



#### Note:

1. Contrast Ratio (CR) is defined mathematically as:

- 2. Surface luminance is luminance value at point 5 across the LCD surface 50cm from the surface with all pixels displaying white. From more information see **Fig. 2**. LED current I<sub>F</sub> = typical value (without driver board), LED input VDDB =24V, I<sub>DDB</sub>. = Typical value (with driver board), L<sub>WH</sub>=Lon5 where Lon5 is the luminance with all pixels displaying white at center 5 location.
- 3. The variation in surface luminance, δWHITE is defined (center of Screen) as (Fig. 3):

$$\delta_{WHITE(9P)}$$
= Maximum( $L_{on1}, L_{on2}, ..., L_{on9}$ )/ Minimum( $L_{on1}, L_{on2}, ... L_{on9}$ )

**4.** Response time  $T_{Y}$  is the average time required for display transition by switching the input signal for five luminance ratio (0%,25%,50%,75%,100% brightness matrix) and is based on Frame rate = 60Hz to optimize.

Measur	ed	Target						
Respon	ise Time	0%	25%	50%	75%	100%		
	0%		0% to 25%	0% to 50%	0% to 75%	0% to 100%		
	25%	25% to 0%	1100	25% to 50%	25% to 75%	25% to 100%		
Start	50%	50% to 0%	50% to 25%		50% to 75%	50% to 100%		
	75%	75% to 0%	75% to 25%	75% to 50%		75% to 100%		
	100%	100% to 0%	100% to 25%	100% to 50%	100% to 75%			

T<sub>Y</sub> is determined by 10% to 90% brightness difference of rising or falling period. (As illustrated)

The response time is defined as the following figure and shall be measured by switching the input signal for "any level of gray(bright)" and "any level of gray(dark)".

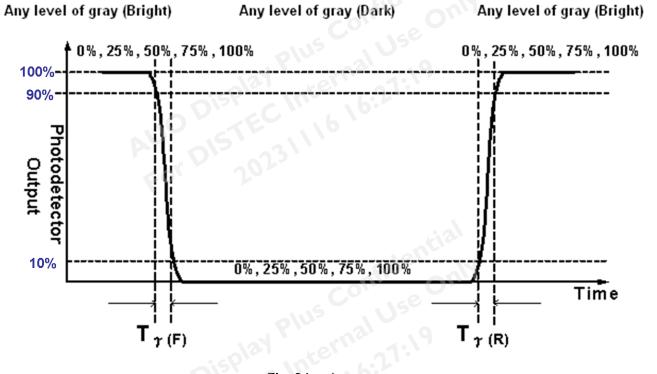


Fig. 2 Luminance



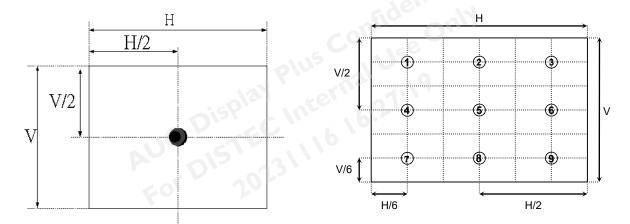


Fig. 3

**5.** Viewing angle is the angle at which the contrast ratio is greater than 10. The angles are determined for the horizontal or x axis and the vertical or y axis with respect to the z axis which is normal to the LCD surface. For more information see **Fig. 4**.

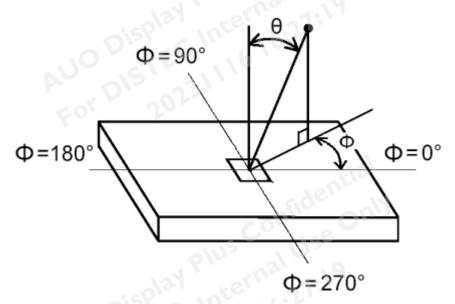


Fig. 4 Viewing Angle



## **4 Interface Specification**

#### 4.1 Input power

The P320HVN04.6 module requires power inputs which are employed to power the LCD electronics and to drive the TFT array and liquid crystal.

Item	10 ELE	Symbol	Min.	Тур.	Max	Unit	Note
Power Supply Input Voltage		$V_{DD}$	10.8	12	13.2	V	1
Dower Supply Input Current	Black pattern	· I <sub>DD</sub>	-	0.4	0.48	Α	
Power Supply Input Current	White pattern		-	8.0	0.96	Α	2
Dower Concumption	Black pattern	D	-	4.8	5.76	Watt	
Power Consumption	White pattern	Pc	. ver	9.6	11.52	Watt	
Inrush Current		Irush	110		3	Α	3

#### Note


- 1. The ripple voltage should be fewer than 5% of VDD.
- 2. Test Condition:
  - (1) V<sub>DD</sub> = 12.0V, (2) Fv = 60Hz, (3) Fclk= 74.25MHz, (4) Temperature = 25 °C
  - (5) Power dissipation check pattern. (Only for power design)
    - a. Black pattern

b. White pattern





3. Measurement condition: Rising time = 400us

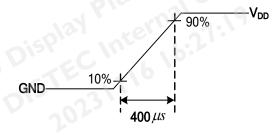



## **4.2 Input Connection**

■LCD connector: JAE FI-RTE51SZ-HF / P-two 187059-5122 or compatible


PIN	Symbol	Description	Note
1	N.C.	No connection (for AUO test only. Do not connect)	2
2	N.C.	No connection (for AUO test only. Do not connect)	2
3	N.C.	No connection (for AUO test only. Do not connect)	2
4	N.C.	No connection (for AUO test only. Do not connect)	2
5	N.C.	No connection (for AUO test only. Do not connect)	2
6	N.C.	No connection (for AUO test only. Do not connect)	2
7	LVDS_SEL	Open/High(3.3V) for NS, Low(GND) for JEIDA	3,4
8	N.C.	No connection (for AUO test only. Do not connect)	2
9	N.C.	No connection (for AUO test only. Do not connect)	2
10	N.C.	No connection (for AUO test only. Do not connect)	2
11	GND	Ground	
12	CH1_Y0-	LVDS Channel 1, Signal 0-	
13	CH1_Y0+	LVDS Channel 1, Signal 0+	
14	CH1_Y1-	LVDS Channel 1, Signal 1-	
15	CH1_Y1+	LVDS Channel 1, Signal 1+	
16	CH1_Y2-	LVDS Channel 1, Signal 2-	
17	CH1_Y2+	LVDS Channel 1, Signal 2+	
18	GND	Ground	
19	CH1_CLK-	LVDS Channel 1, Clock -	
20	CH1_CLK+	LVDS Channel 1, Clock +	
21	GND	Ground	
22	CH1_Y3-	LVDS Channel 1, Signal 3-	
23	CH1_Y3+	LVDS Channel 1, Signal 3+	
24	N.C.	No connection (for AUO test only. Do not connect)	2
25	N.C.	No connection (for AUO test only. Do not connect)	2
26	N.C.	No connection (for AUO test only. Do not connect)	2
27	N.C.	No connection (for AUO test only. Do not connect)	2
28	CH2_Y0-	LVDS Channel 2, Signal 0-	
29	CH2_Y0+	LVDS Channel 2, Signal 0+	
30	CH2_Y1-	LVDS Channel 2, Signal 1-	
31	CH2_Y1+	LVDS Channel 2, Signal 1+	
32	CH2_Y2-	LVDS Channel 2, Signal 2-	
33	CH2_Y2+	LVDS Channel 2, Signal 2+	
-0.4	GND	Ground	
34	O NE	S. Salla	



36	CH2_CLK+	LVDS Channel 2, Clock +	
37	GND	Ground	
38	CH2_Y3-	LVDS Channel 2, Signal 3-	
39	CH2_Y3+	LVDS Channel 2, Signal 3+	
40	N.C.	No connection (for AUO test only. Do not connect)	2
41	N.C.	No connection (for AUO test only. Do not connect)	2
42	N.C.	No connection (for AUO test only. Do not connect)	2
43	N.C.	No connection (for AUO test only. Do not connect)	2
44	GND	Ground	
45	GND	Ground	
46	GND	Ground	
47	N.C.	No connection (for AUO test only. Do not connect)	2
48	$V_{DD}$	Power Supply, +12V DC Regulated	
49	$V_{DD}$	Power Supply, +12V DC Regulated	
50	V <sub>DD</sub>	Power Supply, +12V DC Regulated	
51	V <sub>DD</sub>	Power Supply, +12V DC Regulated	

#### Note:

1. Pin number start from the left side as the following figure.

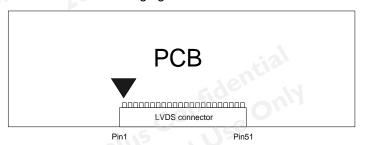

- 2. Please leave this pin unoccupied. It cannot be connected with any signal (Low/GND/High).
- 3. Input control signal threshold voltage definition

Item	Symbol	Min.	Тур.	Max.	Unit
Input High Threshold Voltage	VIH	2.7	-	3.6	V
Input Low Threshold Voltage	VIL	0	-	0.6	V

4. LVDS data format selection

LVDS_SEL	Mode
H or OPEN	NS
L	JEIDA




### 4.3 Input Data Format

#### 4.3.1 LCD Pixel Format

															43						
ata Format													: d	ex	10-						
D Pixel For	ma	t																			
		1			2					4	10	0			9	_1	91	9	19	920	0
1st Line	R	G	В	R	G	В		/17	1	ر د د	\	6	7.1			R	G	В	R	G	В
				5			3					-					-		•	-	
					7							-									
		:			:												:			:	
		:			:												:			:	
		•			•							•					_			•	
1080 Line	R	G	В	R	G	В	Y	. \.	عر				U'		9	R	G	В	R	G	В

#### 4.3.2 LVDS Data Format

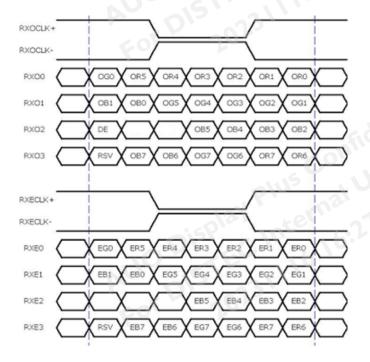

tial	<b>8 Bit</b> ( Bit ()						
MSB	R7	G7	B7				
	R6	G6	B6				
9	R5	G5	B5				
	R4	G4	B4				
	R3	G3	В3				
	R2	G2	B2				
R1 G1 B1							
LSB	R0	G0	B0				

#### Note:

- a. O = "Odd Pixel Data" E = "Even Pixel Data"
- b. Refer to 4.3.1 LCD pixel format, the 1st data is 1 (Odd Pixel Data), the 2<sup>nd</sup> data is 2 (Even Pixel Data) and the Display Plus Col last data is 1920 (Even Pixel Data).



### 4.3.3 Color Input Data Reference

The brightness of each primary color (red, green and blue) is based on the 8 bit gray scale data input for the color; the higher the binary input, the brighter the color. The table below provides a reference for color versus data input.

#### **COLOR DATA REFERENCE**

			_	olor	Da	ta		1	1									1							
Color		RE							_		EEN -	1					_	BLU							
		MS		D.E.	D4	R3	Da	R1		MS G7		OF.	C 4	<u></u>	<u></u>	LS	G0	MS D7	В В6	D.E.	Б4	D2	D0	LS	SB BC
	Disale	R7	+	R5								G5		G3							B4	B3			
	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Б.	Green(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
Basic	Blue(255)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
Color	Cyan	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	_1	1	1	1	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
	RED(000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(001)	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
R																									
	RED(254)	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	RED(255)	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN(000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	GREEN(001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0
G																									
	GREEN(254)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0
	GREEN(255)	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1	0	0	0	0	0	0	0	0
	BLUE(000)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	BLUE(001)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
В																									
	BLUE(254)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	0
	BLUE(255)	0	0	0	0	rpo se c	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1	1	1



## **5 Signal Timing Specification**

This is the signal timing required at the input of the user connector. All of the interface signal timing should be satisfied with the following specifications for its proper operation.

#### 5.1 Input Timing

## 5.1.1 Timing table

# Timing Table (DE only Mode)


Signal	Item	Symbol	Min.	Тур.	Max	Unit
	Period	Tv	1120	1125	1480	Th
Vertical Section	Active	Tdisp (v)	Aent	1080		
	Blanking	Tblk (v)	40	45	400	Th
	Period	Th	1030	1100	1325	Tclk
Horizontal Section	Active	Tdisp (h)	1 19	960		
	Blanking	Tblk (h)	70	140	365	Tclk
Clock	Frequency	Fclk=1/Tclk	53	74.25	82	MHz
Vertical Frequency	Frequency	Fv	47	60	63	Hz
Horizontal Frequency	Frequency	Fh	60	67.5	73	KHz

#### Note:

- (1) Display position is specific by the rise of DE signal only. Horizontal display position is specified by the rising edge of 1st DCLK after the rise of 1st DE, is displayed on the left edge of the screen.
- (2) Vertical display position is specified by the rise of DE after a "Low" level period equivalent to eight times of horizontal period. The 1st data corresponding to one horizontal line after the rise of 1st DE is displayed at the top line of screen.
- (3) If a period of DE "High" is less than 1920 DCLK or less than 1080 lines, the rest of the screen displays black.
- (4) The display position does not fit to the screen if a period of DE "High" and the effective data period do not synchronize with each other.



## 5.1.2 Signal Timing Waveform

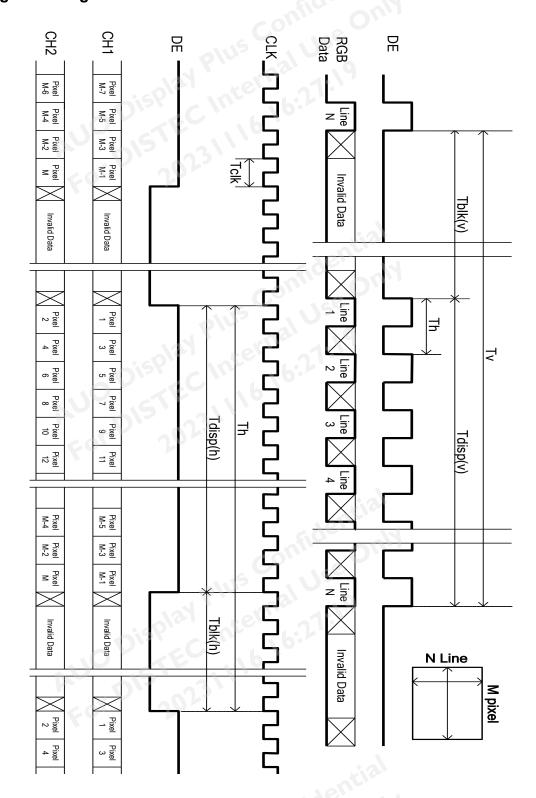




## 5.2 Input interface characteristics

### 5.2.1 LVDS spec

	Parameter	Symbol	, 0	Value		Unit	Note
	Falanietei	Symbol	Min.	Тур.	Max	Ullit	Note
	Input Differential Voltage	VID	200	400	600	mV <sub>DC</sub>	1
	Differential Input High Threshold Voltage	V <sub>тн</sub>	+100		+300	mV <sub>DC</sub>	1
	Differential Input Low Threshold Voltage	V <sub>TL</sub>	-300		-100	mV <sub>DC</sub>	1
	Input Common Mode Voltage	V <sub>ICM</sub>	1.1	1.25	1.4	V <sub>DC</sub>	1
LVDS	Input Channel Pair Skew Margin	tskew (CP)	-500	al	+500	ps	2
Interface	Receiver Clock : Spread Spectrum	Fclk_ss	Fclk		Fclk	MHz	3
	Modulation range	C0//	-3%		+3%		
	Receiver Clock : Spread Spectrum	Fss	30		200	KHz	3
	Modulation frequency	The Contract of the Contract o	139				_
	Receiver Data Input Margin	Ce.					
	Fclk = 85 MHz	tRMG	-0.4		0.4	ns	4
	Fclk = 65 MHz		-0.5		0.5		


#### Note:

**1.** VICM = 1.25V

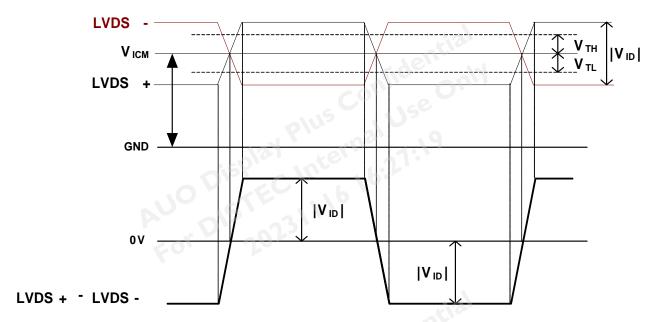




#### 2. Input Channel Pair Skew Margin

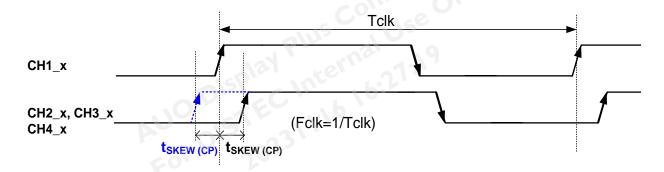


3. LVDS Receiver Clock SSCG (Spread spectrum clock generator) is defined as below figures.

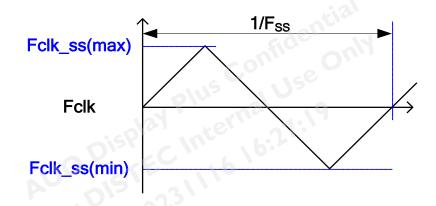

#### 4. Receiver Data Input Margin


Davamatav	Cymab al		Rating		l lmi4	Nets
Parameter	Symbol	Min	Туре	Max	Unit	Note
Input Clock Frequency	Fclk	Fclk (min)	-69	Fclk (max)	MHz	T=1/Fclk
Input Data Position0	tRIP1	- tRMG	C 00	[tRMG]	ns	
Input Data Position1	tRIP0	T/7- tRMG	T/7	T/7+ tRMG	ns	
Input Data Position2	tRIP6	2T/7- tRMG	2T/7	2T/7+ tRMG	ns	
Input Data Position3	tRIP5	3T/7- tRMG	3T/7	3T/7+ tRMG	ns	
Input Data Position4	tRIP4	4T/7- tRMG	4T/7	4T/7+ tRMG	ns	
Input Data Position5	tRIP3	5T/7- tRMG	5T/7	5T/7+ tRMG	ns	
Input Data Position6	tRIP2	6T/7- tRMG	6T/7	6T/7+ tRMG	ns	
				6T/7+ tRMG  Reserved. maciejczuk on		
opyright AUO Display	Plus Corp	oration 2023 A	All Rights R	Reserved.	Pa	ge 18 / 35
For DISTEC in	OY	20	J			



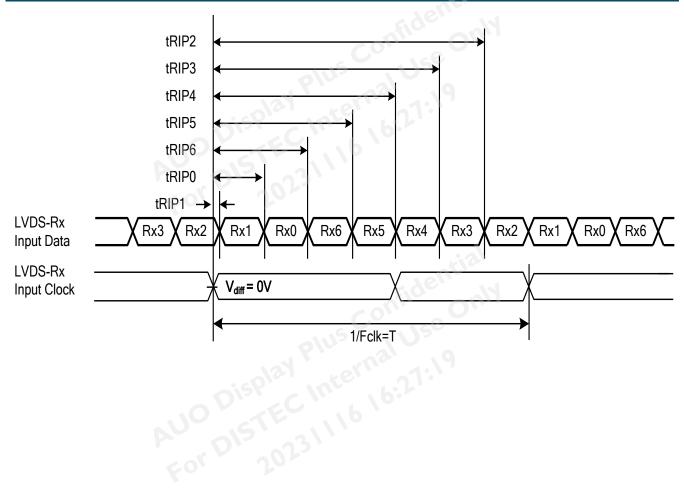



### 5.3 Power Sequence for LCD

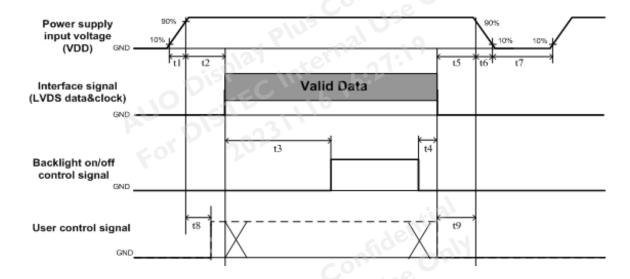

Parameter	P	Values							
Parameter	Min.	Type.	Max.	Unit					
t1	0.4	/p.	30	ms					
t2	40			ms					
t3	640			ms					
t4	0*1			ms					
t5	0		rial	ms					
t6		sider	*2	ms					
t7	1000	Carrie	O'''	ms					
t8	20 <sup>*3</sup>	Ine -11 03	50	ms					
t9	0	re" - 1:1		ms					

#### Note:

- (1) t4=0: concern for residual pattern before BLU turn off.
- (2) t6: voltage of VDD must decay smoothly after power-off. (Customer system decide this value)
- (3) When user control signal is N.C. (no connection), opened in Transmitted end, t8 timing spec can be negligible.




## 6 Backlight Specification

### 6.1 Electrical specification

	Item	S	ymbol	Condition	Min	Тур	Max	Unit	Note
1	Power Supply Input Voltage	e V	/DDB	16.	22.8	24	25.2	V	-
2	Power Supply Input Current	0,-	I <sub>DDB</sub>	VDDB=24V	1	3.33	3.67	Α	1
3	Power Consumption		P <sub>DDB</sub>	VDDB=24V	-	80	88	Watt	1
4	Inrush Current		Irush	VDDB=24V	, k	$a_{I}$	9	Α	2
5	Control signal voltage	Vsignal	Hi	VDDB=24V	2	N.	5.5	V	-
3	Control signal voltage	<b>V</b> Signal	Low	VDDB-24V	0	-	8.0	•	3
6	Control signal current		Signal	VDDB=24V	-0	-	1.5	mA	-
7	External PWM Duty ratio (input duty ratio)	D_	EPWM	VDDB=24V	0	-	100	%	4
8	External PWM Frequency	F_	EPWM	VDDB=24V	120	-	960	Hz	4
9	Input Impedance		Rin	VDDB=24V	300			Kohm	-
10	LED MTTF	LEC	_MTTF	-	-	50,000	-	Hr	5, 6

#### Note:

- 1. Dimming ratio= 100%, ( Ta=25±5°C, Turn on for 45minutes )
- 2. MAX input current while DB turn on, measurement condition VDDB rising time=20ms(VDDB: 10%~90%)

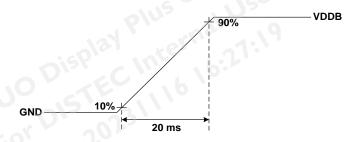

- 3. When BLU off ( VDDB = 24V, VBLON = 0V), IDDB (max) = 0.1A
- 4. Less than 5% dimming control is functional well and no backlight shutdown happened
- **5.** LED MTTF is defined as the time which luminance of LED is 50% compared to its original value. [Operating condition: Continuous operating at Ta = 25±2°C, for single LED only]
- 6. MTTF is a reference index, it is not representative of warranty.



### 6.2 Input Pin Assignment

LED DB connector: CI0114M1HRL-NH(CviLux)

Pin	Symbol	Description	Note
1	VDDB	Power Supply Input Voltage	
2	VDDB	Power Supply Input Voltage	
3	VDDB	Power Supply Input Voltage	
4	VDDB	Power Supply Input Voltage	
5	VDDB	Power Supply Input Voltage	
6	GND	Ground	
7	GND	Ground	
8	GND	Ground	
9	GND	Ground	
10	GND	Ground	
11	NC	NC	3
12	VBLON	BLU On-Off control:	1, 2
13	NC	) NC	3
14	PDIM External PWM		1, 4,

#### Note:

1. input control signal threshold voltage definition

	It	tem	Symbol	Min.	Тур.	Max.	Unit
	Input High Th	reshold Voltage	VIH	2	-	5.5	٧
	Input Low Th	reshold Voltage	VIL	0	5.8	0.8	٧
3L	-ON				onin	0	Uil
Э :	selection						
	VBLON	Note					
	H or OPEN	BL On					
	L	BL Off					


#### 2. VBLON

Mode selection

VBLON	Note
H or OPEN	BL On
L	BL Off

- 3. Please leave this pin unoccupied. It cannot be connected by any signal (Low/GND/High).
- 4. PDIM

PWM Dimming range:





External PWM function dimming ratio 0%~100%, Judge condition as below:

- (1)Backlight module must be lighted ON normally.
- (2) All protection function must work normally.
- (3)Uniformity and flicker could be guaranteed at External PWM function dimming ratio 5%~100%



## 6.3 Power Sequence for Backlight

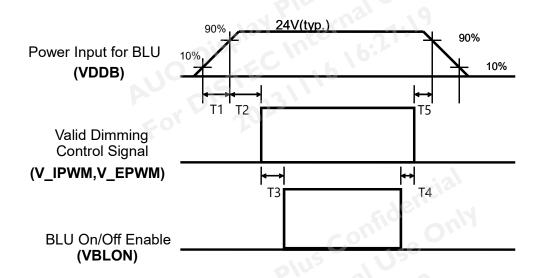

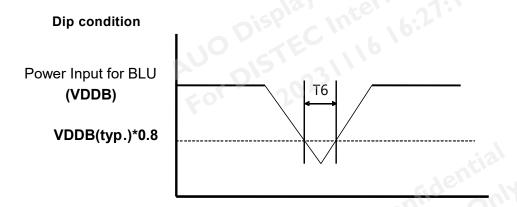

Parameter	Min	Тур	Max	Units
T1	20	10to 16	51	ms *1
T2	250	11.6	-	ms
Т3	200	3		ms
T4	0	-	-	ms
T5	0	-		ms
Т6		-	1000	ms*2

Note 1 T6 describes VDDB dip condition and VDDB couldn't lower than 10% VDDB.




## 7 Mechanical Characteristics

The contents provide general mechanical characteristics for the model P320HVN04.6. In addition the figures in the next page are detailed mechanical drawing of the LCD.

Item		Dimension	Unit	Note	
Outline Dimension	Horizontal	719.2	mm		
	Vertical	413.7	mm		
	Depth (Dmin)	10.0	mm	Front Bezel to Back Bezel	
	Depth (Dmax)	26.3	mm	Front Bezel to Wall Mount	
Weight	4.7	Com	Kg		




## **Front View**

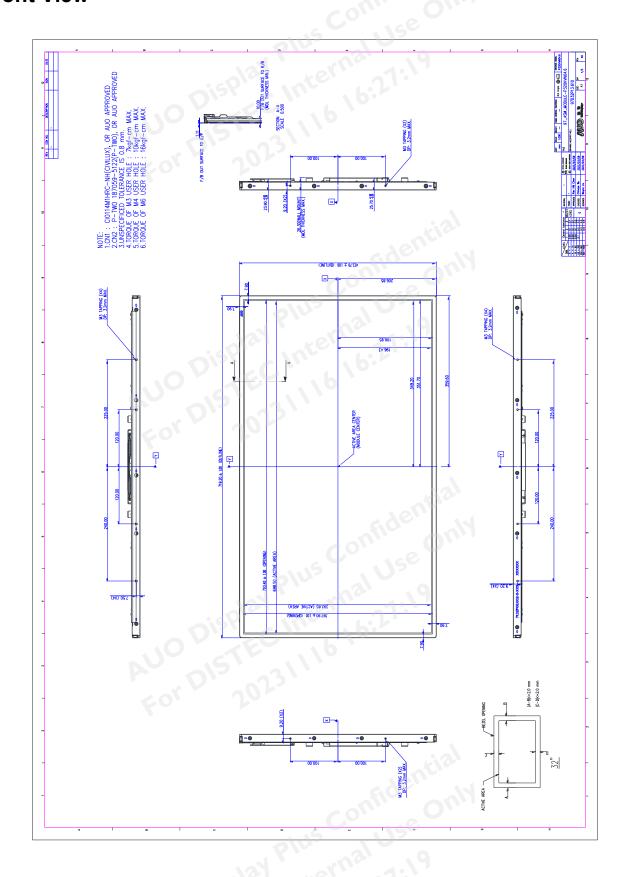



## **Back View**

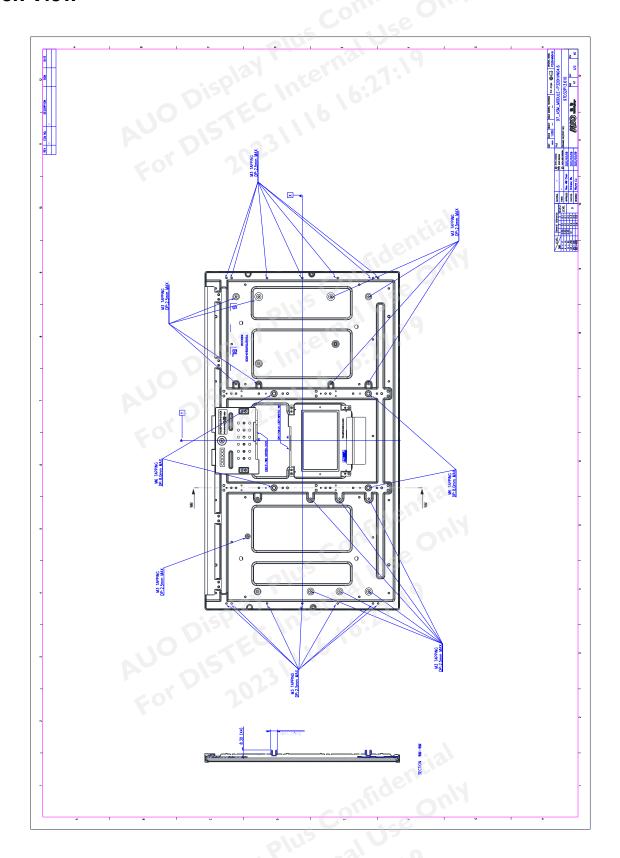



## 8 Reliability Test Items

High temperature storage test	Q'ty 3	Condition 60°C, 500hrs	
Low temperature storage test	3	-20 °C, 500hrs	
High temperature operation test	3	50 °C, 500hrs	
Low temperature operation test	3	-10 °C, 500hrs	
Vibration test (With carton)	1( PKG)	Random wave (1.04Grms 2~200Hz)  Duration : X,Y,Z 20min per axes	
Drop test (With carton)	1( PKG)	Height: TBD cm Direction: 1 corner 3edges 6flats	
	High temperature operation test  Low temperature operation test  Vibration test (With carton)	High temperature operation test 3  Low temperature operation test 3  Vibration test (With carton) 1( PKG)	



### 9 International Standard

### 9.1 Safety

- (1) UL 62368-1: Audio/video, information and communication technology equipment -
  - Part 1: Safety requirements
- (2) IEC 62368-1: Audio/video, information and communication technology equipment -
  - Part 1: Safety requirements
- (3) EN 62368-1: Audio/video, information and communication technology equipment -
  - Part 1: Safety requirements

#### 9.2 EMC

- (1) CISPR 32 "Electromagnetic compatibility of multimedia equipment Emission requirements"
- (2) EN 55032 "Electromagnetic compatibility of multimedia equipment Emission requirements"




## 10 Packing

#### 10.1 Definition of Label

#### A. Panel Label:



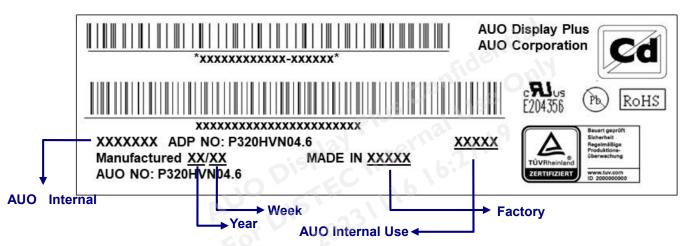

#### **Green mark description**

- (1) For Pb Free Product, AUO will add (Pb) for identification.
- (2) For RoHs compatible products, AUO will add RoHS for identification.


Note: The green Mark will be present only when the green documents have been ready by AUO internal green team. (definition of green design follows the AUO green design checklist.)

#### **B. Carton Label:**






## 10.2 Packing Methods

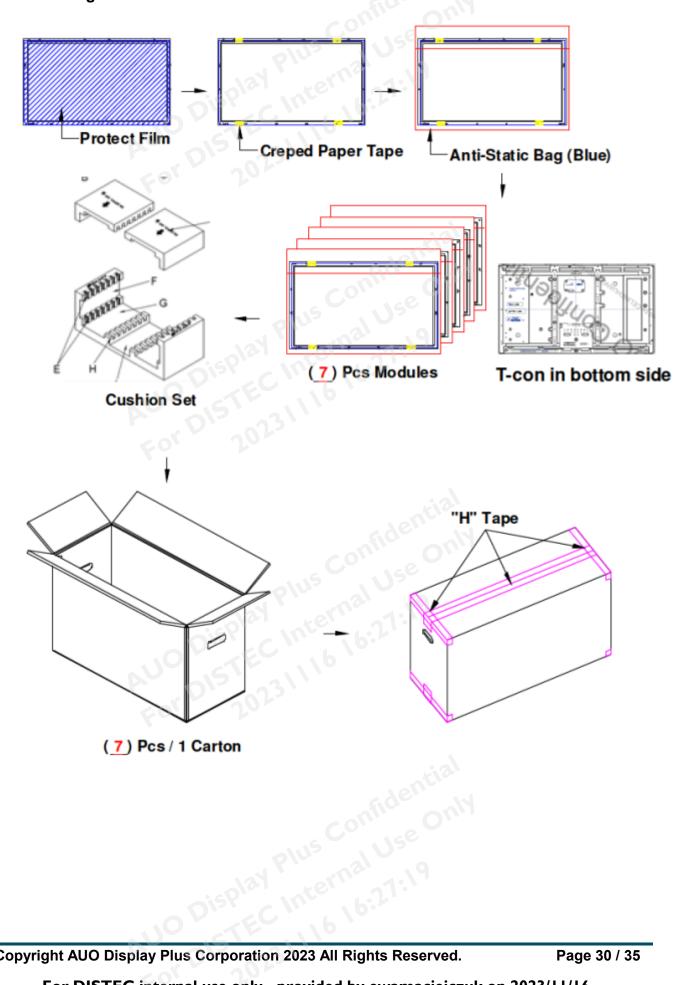



### 10.3 Pallet and Shipment Information

		Specification			Packing
	Item	Qty.	Dimension	Weight (kg)	Remark
1	Packing Box	7pcs/box	820(L)*376(W)*535(H)	39.47	
2	Pallet	1	1150(L)*840(W)*132(H)	15.6	
3	Boxes per Pallet	NUO			
4	Panels per Pallet	, or O			
5	Pallet after packing	42	1150(L)*840(W)*1202(H)	252.42	

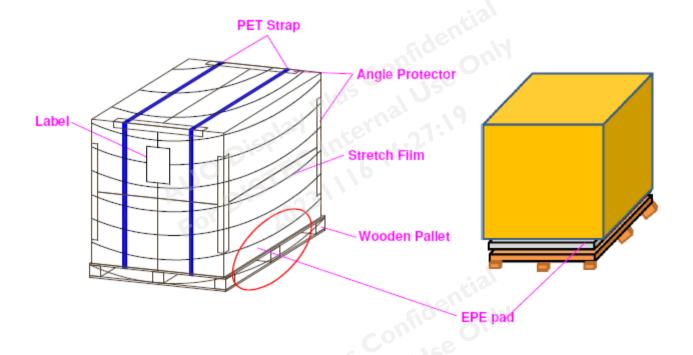



### 11 Precautions

Please pay attention to the followings when you use this TFT LCD module.

### 11.1 Mounting Precautions

- (1) You must mount a module using holes arranged in four corners or four sides.
- (2) You should consider the mounting structure so that uneven force (ex. twisted stress) is not applied to module. And the case on which a module is mounted should have sufficient strength so that external force is not transmitted directly to the module.
- (3) Please attach the surface transparent protective plate to the surface in order to protect the polarizer.

  Transparent protective plate should have sufficient strength in order to the resist external force.
- (4) You should adopt radiation structure to satisfy the temperature specification.
- (5) Acetic acid type and chlorine type materials for the cover case are not desirable because the former generates corrosive gas of attacking the polarizer at high temperature and the latter cause circuit broken by electro-chemical reaction.
- (6) Do not touch, push or rub the exposed polarizer with glass, tweezers or anything harder than HB pencil lead. And please do not rub with dust clothes with chemical treatment. Do not touch the surface of polarizer for bare hand or greasy cloth. (Some cosmetics are detrimental to the polarizer.)
- (7) When the surface becomes dusty, please wipe gently with absorbent cotton or other soft materials like chamois soaks with petroleum benzene. Normal-hexane is recommended for cleaning the adhesives used to attach front/ rear polarizer. Do not use acetone, toluene and alcohol because they cause chemical damage to the polarizer.
- (8) Wipe off saliva or water drops as soon as possible. Their long time contact with polarizer causes deformations and color fading.
- (9) Do not open the case because inside circuits do not have sufficient strength.

#### 11.2 Operating Precautions

- (1) The spike noise causes the mis-operation of circuits. It should be lower than following voltage: V=±200mV(Over and under shoot voltage)
- (2) Response time depends on the temperature. (In lower temperature, it becomes longer.)
- (3) Brightness depends on the temperature. (In lower temperature, it may become lower.) And in lower temperature, response time (required time that brightness is stable after turned on) becomes longer.
- (4) Be careful for condensation at sudden temperature change. Condensation makes damage to polarizer or electrical contacted parts. And after fading condensation, smear or spot will occur.
- (5) When fixed patterns are displayed for a long time, remnant image is likely to occur.
- **(6)** Module has high frequency circuits. Sufficient suppression to the electromagnetic interference shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interface.



(7) The conductive material and signal cables are kept away from LED driver inductor to prevent abnormal display, sound noise and temperature rising.

### 11.3 Operating Condition for Public Information Display

The device listed in the product specification is designed and manufactured for PID (Public Information Display) application. To optimize module's lifetime and function, below operating usages are required.

- (1) Normal operating condition
  - A. Operating temperature: 0~50°C
  - B. Operating humidity: 10~90%
  - C. Display pattern: dynamic pattern (Real display).Note) Long-term static display would cause image sticking.
- (2) Operation usage to protect against image sticking due to long-term static display.
  - A. Suitable operating time: 24 hours a day
  - B. Liquid Crystal refresh time is required. Cycling display between 5 minutes'
  - C. information (static) display and 10 seconds' moving image.
  - D. Periodically change background and character (image) color.
  - E. Avoid combination of background and character with large different luminance.
- (3) Periodically adopt one of the following actions after long time display.
  - A. Running the screen saver (motion picture or black pattern)
  - B. Power off the system for a while
- (4) LCD system is required to place in well-ventilated environment. Adapting active cooling system is highly recommended.
- (5) Product reliability and functions are only guaranteed when the product is used under right operation usages. If product will be used in extreme conditions, such as high temperature/ humidity, display stationary patterns, or long operation time etc..., it is strongly recommended to contact AUO for filed application engineering advice. Otherwise, its reliability and function may not be guaranteed. Extreme conditions are commonly found at airports, transit stations, banks, stock market and controlling systems.

### 11.4 Electrostatic Discharge Control

Since a module is composed of electronic circuits, it is not strong to electrostatic discharge. Make certain that treatment persons are connected to ground through wristband etc. And don't touch interface pin directly.

#### 11.5 Precautions for Strong Light Exposure

- (1) Strong light exposure causes degradation of polarizer and color filter.
- (2) To keep display function well as a digital signage application, especially the component of TFT is very sensitive to sunlight, it is necessary to set up blocking device protecting panel from radiation of ambient environment.



### 11.6 Storage

When storing modules as spares for a long time, the following precautions are necessary.

- (1) Store them in a dark place. Do not expose the module to sunlight or fluorescent light. Keep the temperature between 5°C and 35°C at normal humidity.
- (2) The polarizer surface should not come in contact with any other object. It is recommended that they be stored in the container in which they were shipped.
- (3) Storage condition is guaranteed under packing conditions.
- (4) The phase transition of Liquid Crystal in the condition of the low or high storage temperature will be recovered when the LCD module returns to the normal condition.

#### 11.7 Handling Precautions for Protection Film

- (1) The protection film is attached to the bezel with a small masking tape. When the protection film is peeled off, static electricity is generated between the film and polarizer. This should be peeled off slowly and carefully by people who are electrically grounded and with well ion-blown equipment or in such a condition, etc.
- (2) When the module with protection film attached is stored for a long time, sometimes there remains a very small amount of glue still on the bezel after the protection film is peeled off.
- (3) You can remove the glue easily. When the glue remains on the bezel or its vestige is recognized, please wipe them off with absorbent cotton waste or other soft material like chamois soaked with normal-hexane. AUO Display Plus Confidential Use Only Plus Conf



#### 11.8 Dust Resistance

- (1) AUO module dust tests are conducted with marked areas (e.g., holes and slits around the front bezel and back cover) sealed, to comply with JIS D0207 (see below figure).
- (2) To prevent particles from entering the module, please ensure the set has all the highlighted areas (holes and slits) adequately sealed or covered by set mechanism.
- (3) AUO's testing procedure cannot replicate all real world operation scenarios. It is up to the module user to apply the most appropriate dust resistance solution for its particular application.

(TBD) AUO Display Plus Confidential Use Only For DISTEC Internal Use.



Our company network supports you worldwide with offices in Germany, Austria, Switzerland, the UK and the USA. For more information please contact:

Headquarters

Germany



FORTEC GROUP

FORTEC Elektronik AG

Augsburger Str. 2b 82110 Germering

Phone: +49 89 894450-0
E-Mail: info@fortecag.de
Internet: www.fortecag.de

Fortec Group Members

Austria



FORTEC

FORTEC Integrated GmbH Office Vienna

Nuschinggasse 12 1230 Wien

Phone: +43 1 8673492-0
E-Mail: info@fortec-integrated.de
Internet: www.fortec-integrated.de

Germany



FORTEC INTEGRATED

FORTEC Integrated GmbH

Augsburger Str. 2b 82110 Germering

Phone: +49 89 894363-0
E-Mail: info@fortec-integrated.de
Internet: www.fortec-integrated.de

Switzerland



FORTEC SWITZERLAND

FORTEC Switzerland AG

Bahnhofstraße 3 5436 Würenlos

 Phone:
 +41 44 7446111

 E-Mail:
 info@fortec.ch

 Internet:
 www.fortec.ch

**United Kingdom** 



FORTEC UNITED KINGDOM

FORTEC Technology UK Ltd.

Osprey House, 1 Osprey Court Hinchingbrooke Business Park Huntingdon, Cambridgeshire, PE29 6FN

Phone: +44 1480 411600
E-Mail: info@fortec.uk
Internet: www.fortec.uk

USA





Apollo Display Technologies, Corp.

87 Raynor Avenue, Unit 1 Ronkonkoma, NY 11779

Phone: +16315804360
E-Mail: info@apollodisplays.com
Internet: www.apollodisplays.com